



**PLC**  
**+ HMI**  
ALL IN ONE™

**Powerful Software**

**Outstanding Support**

**Complete Range of PLCs**

**UNISTREAM®**  
**VISION®**  
**SAMBA®**  
**JAZZ® & M91™**



## Powerful Software

Single, intuitive, feature-rich programming environment & utilities suite


Unitronics provides a powerful solution; our software is more than a match for any requirement. Hardware configuration, HMI design and communications are all programmed in a single, intuitive software environment, which includes an extensive utilities suite with DataExport, Remote Access and more. This all-in-one approach reduces the time and effort needed to program a unit. Not only is our software user-friendly, all of Unitronics software and utilities are provided at no extra cost.



## Outstanding Support

Expert support without fees or tiers

**“The support, both via telephone, email and the Unitronics forum, is among the best in the industry”** says Jose Padro, President of Alpha Systems, Inc. Unitronics offers best-of-breed technical support to every user without added fees, tiers, or hoops to jump through. Every question we receive is answered by an experienced member of our support team. The same team of experts is available at every step of the project for continuous coverage.

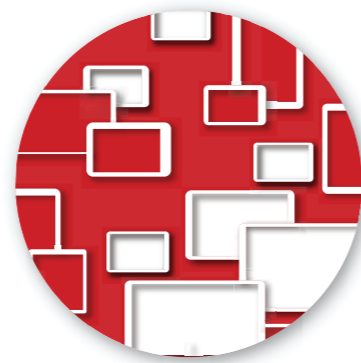

## Complete Range of PLCs

A range of product lines to match your exact requirements

With 25 years of experience in automation, Unitronics has established several PLC lines with options to meet a diverse range of requirements. Our R&D strategy is to stay close to the market; we listen to our customer's current needs and future plans and develop new solutions accordingly. This strategy enables us to offer simple, tried-and-true solutions alongside cutting edge innovations.

### Table of Contents

### Page

#### UniStream Series

Modular All-in-One .....	4
UniLogic® - All-in-One Software .....	6
UniStream® Panels .....	8
I/O & COM Modules for UniStream®.....	9

#### Vision Series

VisiLogic™ - All-in-One software.....	10
Software Utilities.....	11
Vision 1210 / 1040.....	12
Vision 700.....	14
Vision 570J / 570 / 560.....	16
Vision 430.....	18
Vision 350J / 350.....	20
Vision 130J / 130.....	22
Vision 120.....	24
Vision 200.....	25

#### Samba Series

Samba™.....	26
-------------	----

#### Jazz & M91 Series

Jazz®.....	28
M91.....	30
I/O & COM Modules .....	32
Unitronics Industrial Automation Solution.....	34

# Modular All-in-One

All-in-One, simple configuration—saves on cabinet space and wiring costs

The UniStream® platform comprises of a versatile and powerful CPU, a variety of elegant HMI touch-panels, I/O modules and communication modules that are very easy to install and require minimal wiring.




Integrate third-party devices via EtherNet/IP™, CANbus or RS232/485 using MODBUS or CANopen. Use the UniLogic® Message Composer to adapt UniStream to any protocol.

- Audio Out
- microSD
- 2xUSB (Host)
- USB (Programming)
- 2x Ethernet (for daisy-chaining)

Supports **EtherNet/IP™**

I/O or Communication modules: Simply snap to the back of the HMI panel—no need to move any of the neighboring units. Use “Wide” I/O modules for a denser I/O arrangement (their model numbers include a “W”).

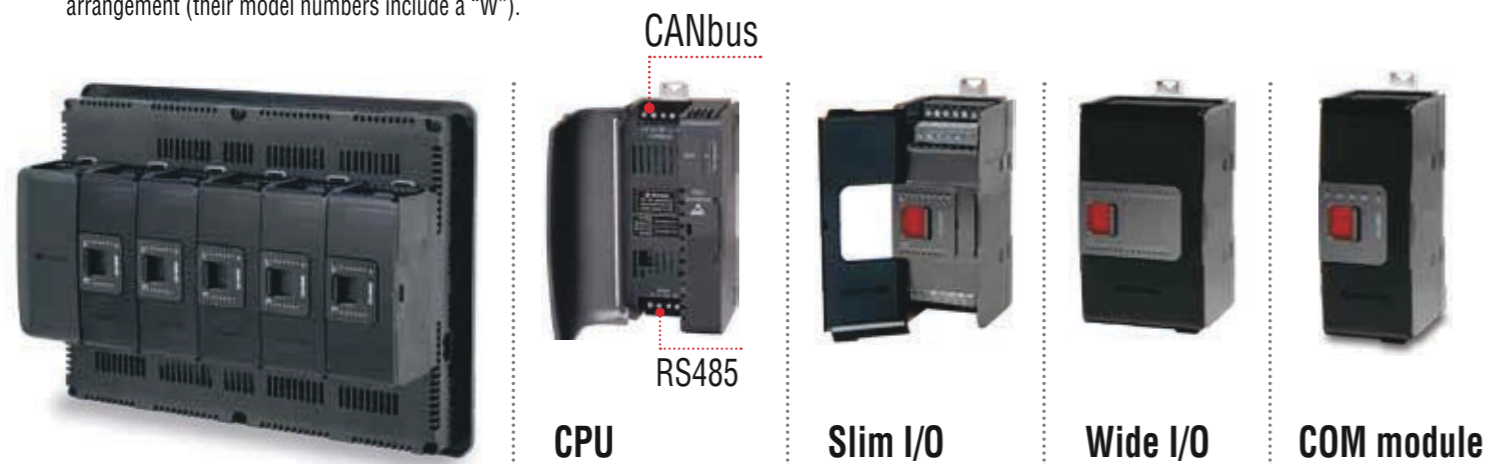

# Remote Access

Access your PLC from anywhere at anytime



Connect directly via Ethernet or USB, or use VNC to connect mobile phone, tablet, or PC. Use your browser to surf to UniStream’s built-in webserver.





# UniLogic® Top Features

UniLogic® Studio provides a unified environment for hardware and communication configuration, Ladder, and HMI applications.

## All-in-One ...

Ladder, HMI & Web Server, Hardware & Communications, Data Trends & Recipes, Alarms and more

## Build-it-Once ...

Reuse Library: Functions, HMI & Webpages

## Context-sensitive ...

Toolbox for Ladder, HMI & Web Elements

## Power from C ...

Structs & C Functions

## New!

- SQL
- Custom Controls
- HMI to Web Page



# UNILOGIC®

Studio



### All-in-One Ergonomic Design - Everything is Visible

The Solution Explorer shows it all: Hardware Configuration, Ladder functions, HMI and Webserver screens, Actions, Data Tables, Data Samplers, Communication protocols, SMS, and emails. Context-sensitive toolboxes display only relevant options and functions.



### Structs - Tag Database on Steroids

You create Structs - groups of data tags of different types organized into a single, logical unit - and reuse them across programs, especially with UDFBs (User Defined Function Blocks). UniLogic's built-in Structs enable you to configure and control hardware and complex functions such as Communications and PID.



### Speed Ladder Programming - plus "C" Power

Build your Ladder: drag & drop elements that snap into place, error-free. Use the built-in C Function editor to write C functions. UniLogic means you 'write-it-once': create code to use, reuse, and export across projects. Create UDFBs (User Defined Function Blocks) - self-contained functions for tasks such as oven control.




### Power Data Tools - Data Sampler, Data Tables, Recipes, \*SQL

Data Samplers record dynamic application data, such as output values, at fixed intervals into files and display it as Trend graphs on the HMI. Data Tables organize and manipulate data via Ladder, create data logs, implement Recipes, import/export values from/to Excel, allow users to enter/edit data into Data Tables via HMI panel, and more. NEW SQL Connector: Access SQL databases, run Queries, connect Data Tables to SQL.



### Web Server: Web pages - No HTML required


Design elegant web pages via a drag & drop interface, identical to the HMI editor. A rich graphic library is at your disposal. The Web toolbox offers user controls and widgets, enabling the end user to view and enter application data via any web browser.



### Design Beautiful HMI Displays - Stream Video, Audio, PDF

UniLogic's extensive free graphics library and HMI widgets enable you to be a graphic artist. The simple HMI editor supports layers, image transparency, overlap, and rotation. The Toolbox offers drag & drop widgets: Video and Audio players, Data Tables, complex Trend graphs and gauges for the display of run - time values, and more.

New Custom Controls: design controls, store in Library - reuse anywhere!



### Build-it-Once, then Reuse - the Ultimate Time Saver

Add your UDFBs, HMI screens, Custom Controls and Web Pages to the Library. Then, drag & drop them where you need them - UniLogic takes care of the tags. You can import your Library into any project, and share it with others.




### Languages - from Italian to Chinese at the touch of a button

UniLogic supports any language that you can type - including Asian languages such as Chinese, Japanese, and Korean. You simply enter translated text into the Language Table Translation. Instantly switch HMI language via user actions or program events.



### Built-in Alarms - Easily Boost Application Safety

Compliant with ISA 18.2 standard guidelines for Alarm Management systems in the process industries. Intuitive features allow operators to detect Alarms, analyze them, and take action. Export your Alarm Log via FTP, send it via email, or copy it directly from the controller via a DOK. Alarms feature full multi-language support.



### Communications - Configuration not Programming

Incredibly fast, easy to configure and implement, UniStream data communications function independently of Ladder. A single PLC can contain multiple slave definitions - and multiple master definitions. Communicate with any device via plug-and-play for protocols such as MODBUS, CANopen, SNMP, and EtherNet/IP. Use Message Composer for data communications with devices such as frequency converters and bar-code readers via any Ethernet, CANbus or serial 3rd-party protocol. UniStream also supports CAN Layer 2, FTP Client/Server, SMS, email, and communications via GSM/GPRS modem.

Remotely Access your UniStream via VNC from PC, cellphone, or tablet. Plus, the built-in Web Server enables secure remote monitoring and data editing.

Completely modular in architecture, UniStream® enables you to create a compact control device that comprises the optimal configuration for your specific application.



	CPU + 7" HMI Panel	CPU + 10.4" HMI Panel	CPU + 15.6" HMI Panel
Part Number	USC-P-B10 and USP-070-B08/USP-070-B10	USC-P-B10 and USP-104-B10/USP-104-M10	USC-P-B10 and USP-156-B10
Number of I/Os per CPU (On board, local and remote)	Up to 2,048		
On board Uni-I/O™ or Uni-COM Modules (All-in-one configuration)	Snap up to 3 slim or 2 wide modules <sup>1</sup>	Snap up to 5 slim or 3 wide modules <sup>1</sup>	
Local Uni-I/O™ Expansion	Use Local Expansion Adapters to add up to 80 slim modules or 50 wide modules <sup>1</sup>		
Remote I/O Expansion	Use EX-RC1 adapters to further extend the number of I/Os <sup>(4)</sup>		
Bit Operation	0.13 μs		
Ladder Memory	1 MB		
External Memory	microSD and USB Flash drive		
Video	Show MPEG-4 videos on the HMI screen		
Audio	Play MP3 audio files via internal speaker or external speakers via audio-out jack		
Power Supply	12/24VDC		
Backup Battery	CR2032 Back-up RTC values, system data and retained tags		
Communication	2 Ethernet • 1 RS485 • 1 CANbus		
Ports	2 USB host ports • 1 USB device port for programming		
Protocols	MODBUS, EtherNet/IP™, CANopen, SNMP, FTP, BACnet <sup>(2)</sup> , RTSP, VNC, UniCAN, GSM (SMS, GPRS), KNX, Message Composer for 3 <sup>rd</sup> party protocols		
HMI Panel	TFT, LCD, HMI Panel		
Type	TFT, LCD, HMI Panel		
Size	7"	10.4"	15.6"
Touch screen	Resistive Analog	USP-104-B10: Resistive Analog USP-104-M10: Capacitive multi-touch, 5-fingers	Resistive Analog
Resolution	800x480 (WVGA)	800x600 (SVGA)	1366x768
Viewing Area Height x Width (mm)	USP-070-B08: 152.4 x 91.44 USP-070-B10: 154.08 x 85.92	211.2 x 158.4	344.23 x 193.53
Colors	65,536 (16bit)		16M (24bit)
Display Backlight Illumination	White LED		
Environment	IP66, IP65 and NEMA4X when panel-mounted <sup>(3)</sup>		
Protection	IP66, IP65 and NEMA4X when panel-mounted <sup>(3)</sup>		
Operating Temperature	-20°C to 55°C (-4°F to 131°F)		0°C to 50°C (32°F to 122°F)

#### Local Expansion Adapters

UAG-XK125	Short Range Kit, 125 cm
UAG-XKP125	Short Range + embedded Power Supply Kit, 125 cm
UAG-XK300	Short Range Kit, 300 cm
UAG-XKP300	Short Range Kit + embedded Power Supply, 300 cm
UAG-XKPLXXXX	Long Range + embedded Power Supply, lengths: 600, 1200, 1500, 2000, 3000cm

#### Uni-COM™ Communication Modules

UAC-01RS2	1x RS232
UAC-02RS2	2x RS232
UAC-02RSC	1x RS232 port and 1x RS485 port

<sup>(1)</sup> Uni-I/O™ module series are "Slim" & "Wide". "Wide" I/O modules offer a denser I/O arrangement; their model numbers comprise a "W". In width, one "Wide" module = 1.5 "Slim" module.


<sup>(2)</sup> Using a gateway module: GW-BAC1

<sup>(3)</sup> UniStream complies with IP66 and NEMA4X only with the audio seal installed, please refer to the installation guide of the HMI panel for information.

<sup>(4)</sup> EX-RC1: via CANbus, integrate standard Unitronics' I/O modules at distances of up to 1000m. Refer to website for more information.

## Expandability On-Board, Local, & Remote I/Os

Select the perfect combination of Uni-I/O™ modules and configure them to fit your application. Snap up to 5 modules on a 10.4" or 15.6" HMI panel, up to 3 on a 7" panel. Expand further either locally or remotely.



	Articles Number	Inputs				Outputs			
		Digital (Isolated)	HSC/Shaft-encoder <sup>4</sup>	Analog	Temperature Measurement	Transistor <sup>5</sup> (Isolated)	PWM/HSO <sup>5</sup>	Relay	Analog
Digital	UID-1600	16 Sink/Source	—	—	—	—	—	—	—
	UID-0808T	8 Sink/Source	—	—	—	8 Source(pnp)	—	—	—
	UID-W1616T <sup>3</sup>	16 Sink/Source	—	—	—	16 Source(pnp)	—	—	—
	UID-0808THS <sup>1</sup>	8 Sink/Source	2 250kHz 32-bit	—	—	8 Source(pnp)	2 <sup>2</sup> 250kHz 2 3kHz	—	—
	UID-0016T	—	—	—	—	16 Source(pnp)	—	—	—
	UID-0808R	8 Sink/Source	—	—	—	—	—	8	—
	UID-W1616R <sup>3</sup>	16 Sink/Source	—	—	—	—	—	16	—
	UID-0016R	—	—	—	—	—	—	16	—
	Analog and Temperature	UIA-0006	—	—	—	—	—	—	—
UIA-0402N		—	—	4 0-10V, 0-20mA, 4-20mA 13-bit	—	—	—	—	2 0-10V 14-bit ±10V 13-bit+sign 0-20mA, 4-20mA 13-bit
UIA-0800N		—	—	8 0-10V, 0-20mA, 4-20mA 13-bit	—	—	—	—	—
UIS-04PTN		—	—	—	4 PT100/Ni100/Ni120	—	—	—	—
UIS-04PTKN		—	—	—	4 PT1000/Ni1000/Ni1200	—	—	—	—
UIS-08TC		—	—	—	8 Thermocouple	—	—	—	—
Digital/Analog		UIS-WCB1 <sup>1,3</sup>	10 Sink/Source	2 10kHz 32bit	2 (Isolated) 0-10V, 0-20mA, 4-20mA 14-bit	2 (Isolated) Thermocouple, PT100/Ni100/Ni120	2 <sup>6</sup> Sink (npn)	2 250kHz	8
	UIS-WCB2 <sup>1,3</sup>	10 Sink/Source	2 10kHz 32bit	2 (Isolated) 0-10V, 0-20mA, 4-20mA 14-bit	2 (Isolated) Thermocouple, PT100/Ni100/Ni120	8 Source (pnp) 2 <sup>6</sup> Sink(npn)	2 250kHz (Sink outputs only)	—	2 0-10V 14-bit ±10V 13-bit+sign 0-20mA, 4-20mA 13-bit

<sup>1</sup> This module utilizes two high speed blocks that can each be assigned either to the inputs or to the outputs.

<sup>2</sup> 2 outputs are high-speed, up to 250kHz; function as normal or high-speed PWM (same freq. and different duty-cycles). 2 outputs are normal speed; function as normal-speed PWM outputs (same freq. and same duty cycle).

<sup>3</sup> Width: 1 "wide" I/O module = 1.5 "slim" I/O modules

<sup>4</sup> Note that the high-speed inputs are included in the total number of digital inputs.

<sup>5</sup> Note that the high-speed outputs are included in the total number of digital outputs.

<sup>6</sup> Not isolated

#### DIN Rail Power Supplies

UAP-24V24W	24W 24V 1A
UAP-24V60W	60W 24V 2.5A
UAP-24V96W	96W 24V 4A

#### Modems

GSM-KIT-17J-3G	Cinterion GPRS modem, EHS6T, 3G
----------------	---------------------------------




# Powerful Software – included with your All-in-One package

A single, intuitive environment for all of your application needs



**Hardware Configuration**  
Intuitive set up: controller, I/Os, and COM channels

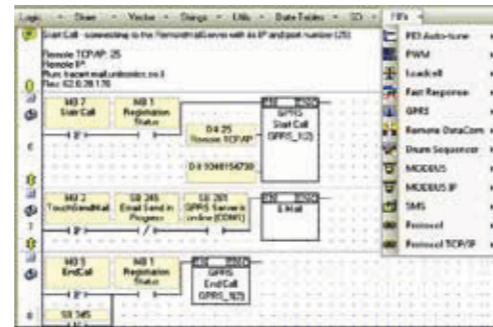

**Ladder Programming**  
Rapidly drag & drop elements and Function Blocks



**HMI Application**  
Create beautiful HMI displays – includes rich image library

**Project Explorer**



**Trend Graphs**  
Display dynamic values in real-time




**Alarms: Built-in Screens**  
Effectively alert staff via Alarm screens



**Web Server**  
Display and edit application values via browser



**Languages - String Library**  
Instantly switch HMI language via screen touch

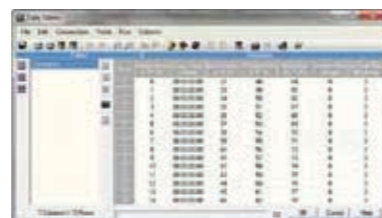

**Data Tables**  
Create logs, import/export data, implement recipes

Software features vary according to controller model

## Smart Utilities – Remote Access, Efficient Data Management and more

Utility Name	Function	Key Features	Targeted Users
<b>Remote Access</b>	View and control a PLC directly from PC, via local or remote connection	<ul style="list-style-type: none"> <li>View an HMI panel: use the PC keyboard + mouse to run the HMI application</li> <li>Operand and Data Table values: view values during runtime, import and export values to/from Excel/.csv files</li> </ul>	<ul style="list-style-type: none"> <li>Operators requiring Remote Access</li> <li>System integrators: remote debugging, troubleshooting, fault-finding</li> </ul>
<b>Remote Operator</b>	Simultaneously view and operate the HMI panels of multiple PLCs in multiple locations	<ul style="list-style-type: none"> <li>Easily place HMI panels side-by-side to monitor distributed systems or applications in several locations</li> <li>Run the HMI applications via PC keyboard + mouse</li> </ul>	<ul style="list-style-type: none"> <li>Control room operators</li> <li>Installation managers</li> </ul>
<b>DataXport</b>	Create Data Logs from Data Tables and operand values in PLCs	<ul style="list-style-type: none"> <li>Harvest data from multiple PLCs - on demand or according to time/date</li> <li>Export the data to Excel/CSV files</li> <li>Automatically email files</li> </ul>	<ul style="list-style-type: none"> <li>Data analysts</li> <li>Plant managers</li> <li>Process engineers</li> </ul>
<b>UniDownload Designer</b>	Create compressed VisiLogic / U90Ladder applications(.udc files) for secure installation in local or remote PLCs	<ul style="list-style-type: none"> <li>Prevent end-users from uploading and opening the application</li> <li>Include an OS to be installed at download Set a Download channel, restrict end-user actions after installation and more</li> </ul>	OEMs / System Integrators can: <ul style="list-style-type: none"> <li>Protect source code</li> <li>Enable customers to install an application without using VisiLogic or U90Ladder</li> </ul>
<b>Download Manager &amp; UniDownloader</b>	Securely install .udc applications in local or remote PLCs	<ul style="list-style-type: none"> <li>Download Manager: installs the same application in multiple PLCs</li> <li>UniDownloader: installs an application in a single PLC</li> </ul>	OEMs / System Integrators in installations with high security requirements
<b>SD Card Suite</b>	Remotely access and manage SD cards and their data	<ul style="list-style-type: none"> <li>Browse a remote PLC's SD card</li> <li>Read/write data, including Data Table files</li> <li>View SD card contents - Trends, logs, alarm history, data tables - export to Excel</li> </ul>	<ul style="list-style-type: none"> <li>Data analysts</li> <li>Plant managers</li> <li>Process engineers</li> </ul>
<b>UniVision Licensing</b>	Safeguard your PLC application security	<ul style="list-style-type: none"> <li>Embeds unique licenses in the PLC, which enables application to run only on a licensed PLC</li> <li>Option to activate or deactivate different sections of your application</li> <li>Prevents theft of applications</li> </ul>	<ul style="list-style-type: none"> <li>System integrators</li> <li>OEMs</li> </ul>
<b>UniOPC Server</b>	Exchange data between Unitronics PLCs and OPC-supported software	<ul style="list-style-type: none"> <li>Create channel to connect PLCs to SCADA systems, such as plant control rooms</li> <li>Compliant with the OPC foundation standards</li> </ul>	Control room operators
<b>UniDDE</b>	Exchange data with Windows based applications	Enables data exchange between Unitronics PLC's and software that supports Microsoft's Dynamic Data Exchange protocols, like Excel	Control rooms operators
<b>Programming tools for developers</b>	Easily implement communication between PLC & PC applications	Using ActiveX & .NET communication drivers	Developers

# VISION 1210™ / 1040™

Advanced PLC from the back—big & high resolution color touchscreen from the front, 12.1"/10.4". Snap-in I/Os for an All-in-One, expands up to 1000 I/Os

## Features:

### HMI

- Up to 1024 user-designed screens
- 1500 images per application
- HMI graphs - color-code Trends
- Built-in alarm screens
- Text String Library - easy localization
- Memory and communication monitoring via HMI - No PC needed

### PLC

- I/O options include high-speed, temperature & weight measurement
- Auto-tune PID, up to 24 independent loops
- Recipe programs and datalogging via Data Tables
- Micro SD card - log, backup, clone & more
- Date & Time-based control

### Communication

- TCP/IP via Ethernet
- Web server: Use built-in HTML pages or design complex pages to view and edit PLC data via the Internet
- Send e-mail function
- SMS messaging
- GPRS/GSM
- Remote Access utilities
- MODBUS protocol support
- BACnet, KNX, M-bus – via 3rd-party converter
- CANbus: CANopen, UniCAN, SAE J1939 and more
- DF1 Slave
- SNMP agent V1
- FB Protocol Utility: enables serial or TCP/IP communications with 3rd-party device; barcode readers, frequency converters, etc.
- Ports: supplied with 2 isolated RS232/RS485, 1 CANbus, 1 USB programming port; 1 port may be added for serial/Ethernet



**V1210**  
Flat Panel



**V1040**  
Classic Panel



### Snap-in I/O

Plug a Snap-in module directly into the back of a Vision PLC.  
Compatible with all V200, V500, V1040 and V1210 Vision series models.

	V1040	V1210
<b>Article Number</b>	V1040-T20B	V1210-T20BJ
<b>I/O Options</b>	Plug these modules directly into the back of the Vision unit to create a self-contained PLC with up to 62 I/Os. Inputs may include Digital, Analog and Temperature Measurement. Outputs may include Transistor, Relay or Analog (sold separately).	
<b>I/O Expansion</b>	Local or Remote I/Os may be added via expansion port or via CANbus. Expand up to 1000 I/Os (See I/O Expansion Modules- page 28).	
<b>Program</b>	Application Logic: 2MB • Images: 40MB • Fonts: 1MB	
<b>Scan Time</b>	9µsec per 1K of typical application	
<b>Memory Operands</b>	8192 coils, 4096 registers, 512 long integers (32 bit), 256 double words (32 bit unsigned), 64 floats, 384 timers (32 bit), 32 counters Additional non-retainable operands: 1024 X-bits, 512 X-integers, 256 X-long integers, 64 X-double words	
<b>Data Tables</b>	120K dynamic RAM data (recipe parameters, datalogs, etc.), up to 256K fixed data	
<b>SD Card (Micro)</b>	Store datalogs, Alarm History, Data Tables, Trend data, export to Excel • Back up Ladder, HMI & OS, clone PLCs	
<b>USB</b>	1 USB programming port (Mini-B)	
<b>Enhanced Features</b>	Trends: graph any value and display on HMI • Built-in Alarm management system • String Library: instantly switch HMI language	
<b>Operator Panel</b>	TFT LCD	
<b>Type</b>	TFT LCD	
<b>Display Backlight Illumination</b>	White LED	
<b>Colors</b>	65,536 colors, 16-bit resolution • Brightness - Adjustable via touchscreen or software	
<b>Display Resolution &amp; Size</b>	800 x 600 pixels (SVGA), 10.4"	800 x 600 pixels (SVGA), 12.1"
<b>Touchscreen</b>	Resistive, Analog	
<b>Keys</b>	9 programmable function keys	Virtual Keyboard
<b>General</b>	12/24VDC	
<b>Power Supply</b>	12/24VDC	
<b>Battery</b>	7 years typical at 25°C, battery back-up for all memory sections and RTC	
<b>Clock</b>	Real-time clock functions (date and time)	
<b>Environment</b>	IP65/NEMA4X (when panel mounted)	IP66/IP65/NEMA4X (when panel mounted)
<b>Standard</b>	CE, UL Many of our products are also UL Class 1 Div 2 and GOST certified - please contact Unitronics	

“I’ve not yet encountered a job that a Unitronics PLC was unable to cover.”

Timothy Moulder,  
Engineer at Black & Decker



# VISION 700™

Advanced PLC from the back – big, high-resolution color 7" touchscreen from the front. Snap-in I/Os create an All-in-One, expands up to 1000 I/Os.

## Features:

### HMI

- Up to 1024 user-designed screens
- 1500 images per application
- HMI graphs - color-code Trends
- Built-in alarm screens
- Text String Library - easy localization
- Memory and communication monitoring via HMI - No PC needed

### PLC

- I/O options include high-speed, temperature & weight measurement
- Auto-tune PID, up to 24 independent loops
- Recipe programs and datalogging via Data Tables
- SD card - log, backup, clone & more
- Date & Time-based control

### Communication

- TCP/IP via Ethernet
- Web server: Use built-in HTML pages or design complex pages to view and edit PLC data via the Internet
- Send e-mail function
- SMS messaging
- GPRS/GSM
- Remote Access utilities
- MODBUS protocol support
- BACnet, KNX, M-bus – via 3rd-party converter
- CANbus: CANopen, UniCAN, SAE J1939, and more
- DF1 Slave
- SNMP Agent V1
- FB Protocol Utility: enables serial or TCP/IP communications with 3rd-party device; barcode readers, frequency converters, etc.
- Ports: supplied with mini-USB programming port, 1 RS232/RS485 and 1 Ethernet port. 1 ports may be added: 1 Serial/Ethernet/Profibus or 1 CANbus

Vision700™ built-in Ethernet port supports 8 sockets – seamless, simultaneous communication with 8 different devices.



V700



“Reliability, ease of use, connectivity and competitive prices are Unitronics’ main strengths.”

Mr. Andrea Della Bosca,  
EV srl

<b>V700</b>	
<b>Article Number</b>	<b>V700-T20BJ</b>
<b>I/O Options</b>	
Snap-in I/O Modules	Plug these modules directly into the back of the Vision unit to create a self-contained PLC with up to 62 I/Os. Inputs may include Digital, Analog, and Temperature measurement. Outputs may include Transistor, Relay, or Analog (sold separately).
I/O Expansion	Local or Remote I/Os may be added via expansion port or via CANbus (See I/O Expansion Modules- page 28)
<b>Program</b>	
Application Memory	Application Logic: 2MB • Images: 40MB • Fonts: 1MB
Scan Time	9µsec per 1K of typical application
Memory Operands	8192 coils, 4096 registers, 512 long integers (32-bit), 256 double words (32-bit unsigned), 64 floats, 384 timers (32-bit), 32 counters. Additional non-retainable operands: 1024 X-bits, 512 X-integers, 256 X-long integers, 64 X-double words
Data Tables	120K dynamic RAM data (recipe parameters, datalogs, etc.), up to 256K fixed data
SD Card	Store datalogs, Alarm History, Data Tables, Trend data, export to Excel • Back up Ladder, HMI & OS, clone PLCs
Enhanced Features	Trends: graph any value and display on HMI • Built-in Alarm management system • String Library: instantly switch HMI language
<b>Operator Panel</b>	
Type	TFT LCD
Display Backlight Illumination	White LED
Colors	65,536 colors, 16 bit resolution • Brightness - Adjustable via touchscreen or software
Display Resolution & Size	800 x 480 pixels, 7"
Touchscreen	Resistive, Analog
Keys	Virtual Keyboard
<b>General</b>	
Power Supply	12/24VDC
Battery	7 years typical at 25°C, battery back-up for all memory sections and RTC
Clock	Real-time clock functions (date and time)
Environment	IP66/IP65/NEMA4X (when panel mounted)
Standard	CE, UL Many of our products are also UL Class 1 Div 2 and GOST certified - please contact Unitronics



# VISION 570™ /560™

Advanced PLC from the back—big & high resolution color 5.7" touchscreen from the front. Snap-in I/Os for an All-in-One, expands up to 1000 I/Os

## Features:

### HMI

- Up to 1024 user-designed screens
- 1000 images per application
- HMI graphs - color-code Trends
- Built-in alarm screens
- Text String Library - easy localization
- Memory and communication monitoring via HMI - No PC needed

### PLC

- I/O options include high-speed, temperature & weight measurement
- Auto-tune PID, up to 24 independent loops
- Recipe programs and datalogging via Data Tables
- SD card - log, backup, clone & more
- Date & Time-based control

### Communication

- TCP/IP via Ethernet
- Web server: Use built-in HTML pages, or design complex pages to view and edit PLC data via the Internet
- Send e-mail function
- SMS messaging
- GPRS/GSM
- Remote Access utilities
- MODBUS protocol support
- BACnet, KNX, M-bus – via 3rd-party converter
- CANbus: CANopen, UniCAN, SAE J1939 and more
- DF1 Slave
- SNMP Agent V1
- FB Protocol Utility: enables serial or TCP/IP communications with 3rd-party device; barcode readers, frequency converters, etc.
- Ports: supplied with 2 isolated RS232/RS485 and 1 CANbus; In Vision570: 1 USB programming port; 1 port may be added for serial/Ethernet



**V570-J**  
Flat Panel



**V570**  
Classic Panel



**V560**

	<b>V570</b>		<b>V560</b>
Article Number	<b>V570-57-T20B</b>	<b>V570-57-T20B-J</b>	<b>V560-T25B*</b>
<b>I/O Options</b>	Plug these modules directly into the back of the Vision unit to create a self-contained PLC with up to 62 I/Os. Inputs may include Digital, Analog, and Temperature measurement. Outputs may include Transistor, Relay, or Analog (sold separately).		
Snap-in I/O Modules	Local or Remote I/Os may be added via expansion port or via CANbus. Expand up to 1000 I/Os (See I/O Expansion Modules- page 28)		
I/O Expansion			
<b>Program</b>	Application Logic: 2MB • Images: 16MB • Fonts: 1MB		
Application Memory	9µsec per 1K of typical application		
Scan Time	8192 coils, 4096 registers, 512 long integers (32-bit), 256 double words (32-bit unsigned), 64 floats, 384 timers (32-bit), 32 counters. Additional non-retainable operands: 1024 X-bits, 512 X-integers, 256 X-long integers, 64 X-double words		
Memory Operands	120K dynamic RAM data (recipe parameters, datalogs, etc.), up to 256K fixed data		
Data Tables	Store datalogs, Alarm History, Data Tables, Trend data, export to Excel • Back up Ladder, HMI & OS, clone PLCs		
SD Card	Trends: graph any value and display on HMI • Built-in Alarm management system • String Library: instantly switch HMI language		
Enhanced Features			
<b>Operator Panel</b>	TFT LCD		
Type	White LED		
Display Backlight Illumination	65,536 colors, 16 bit resolution • Brightness - Adjustable via touchscreen or software		
Colors	320 x 240 pixels (QVGA), 5.7"		
Display Resolution & Size	Resistive, Analog		
Touchscreen	Virtual Keyboard		24 programmable keys Labeling options – function keys or customized
Keys			
<b>General</b>	12/24VDC		
Power Supply	7 years typical at 25°C, battery back-up for all memory sections and RTC		
Battery	Real-time clock functions (date and time)		
Clock	IP65/NEMA4X (when panel mounted)	IP66/IP65/NEMA4X (when panel mounted)	IP65/NEMA4X (when panel mounted)
Environment	CE, UL		
Standard	Many of our products are also UL Class 1 Div 2 and GOST certified - please contact Unitronics		

“ For a first time user, I had a great experience. I look forward to incorporating this brand of product on future jobs. ”

Jeremy Charles Keene,  
Controls Manager at General Broach Company

\* Not yet UL certified

# VISION 430™

Advanced PLC integrated with a 4.3" wide aspect color touchscreen. Includes an onboard I/O configuration, expand up to 512 I/Os

## Features:

### HMI

- 1024 user-designed screens and 1000 images per application
- HMI graphs - color-code Trends
- Built-in alarm screens
- Text String Library - easy localization
- Memory and communication monitoring via HMI - No PC needed

### PLC

- I/O options include high-speed, temperature & weight measurement
- Auto-tune PID, up to 24 independent loops
- Recipe programs and datalogging via Data Tables
- Micro SD card - log, backup, clone & more
- Date & Time-based control

### Communication

- TCP/IP via Ethernet
- Web server: Use built-in HTML pages, or design complex pages to view and edit PLC data via the Internet
- Send e-mail function
- SMS messaging
- GPRS/GSM
- Remote Access utilities
- MODBUS protocol support
- BACnet, KNX, M-bus – via 3rd-party converter
- CANbus: CANopen, UniCAN, SAE J1939 and more
- DF1 Slave
- SNMP Agent V1
- FB Protocol Utility: enables serial or TCP/IP communications with 3rd-party device; barcode readers, frequency converters, etc.
- Ports: supplied with mini-USB programming port and 1 RS232/RS485 ; 2 ports may be added: 1 Serial/Ethernet/Profibus and 1 CANbus



V430



“The huge advantage of this PLC was that - with everything built-in—the communications and use of tags in the HMI was so simple and intuitive.”

Ashley Parr,  
HPS

## Vision430™ models - Onboard I/Os

Article	Summary	Inputs <sup>1</sup>				Outputs				Operating Voltage
		Digital <sup>2</sup>	HSC/Shaft-encoder <sup>2</sup>	Analog	Temperature Measurement	Transistor <sup>3</sup>	PWM/HSO <sup>3</sup>	Relay	Analog	
V430-J-B1	No onboard I/Os	—	—	—	—	—	—	—	—	12/24VDC
V430-J-RH2	10 Digital, 2 D/A Inputs <sup>1</sup> 6 Relay Outputs	12	3 200kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	—	—	6	—	24VDC
V430-J-R34	20 Digital, 2 D/A Inputs <sup>1</sup> 12 Relay Outputs	22	3 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	—	—	12	—	24VDC
V430-J-TR34	20 Digital, 2 D/A Inputs <sup>1</sup> 8 Relay, 4 High-speed Transistor Outputs	22	3 200kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	4 nnp	4 (3 PTO) 200 kHz max	8	—	24VDC
V430-J-RH6	6 Digital, 2 D/A <sup>1</sup> , 4 Analog Inputs 6 Relay Outputs	8	1 200kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA and 4 0-20mA, 4-20mA 10-bit	—	—	—	6	—	24VDC
V430-J-RA22	8 Digital, 2 D/A, 2 TC/PT100/ Digital Inputs <sup>1</sup> 8 Relay, 2 Analog Outputs	12	1 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 14-bit	2 Thermocouple, PT100	—	—	8	2 0-10V, 4 -20mA 12-bit	24VDC
V430-J-TRA22	8 Digital, 2 D/A, 2 TC/PT100/ Digital Inputs <sup>1</sup> 4 Relay, 2 Analog, 4 High-Speed Transistor Outputs	12	1 200kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 14-bit	2 Thermocouple, PT100	4 nnp	4 (2 PTO) 200 kHz max	4	2 0-10V, 4 -20mA 12-bit	24VDC
V430-J-T2	10 Digital, 2 D/A Inputs <sup>1</sup> 12 Transistor Outputs	12	3 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	12 pnp	7 0.5kHz	—	—	24VDC
V430-J-T38	20 Digital, 2 D/A Inputs <sup>1</sup> , 16 Transistor Outputs	22	2 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	16 pnp	7 0.5kHz	—	—	24VDC
V430-J-TA24	8 Digital, 2 D/A, 2 TC/PT100/ Digital Inputs <sup>1</sup> 10 Transistor, 2 Analog Outputs	12	1 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 14-bit	2 Thermocouple, PT100	10 pnp	5 0.5kHz	—	2 0-10V, 4 -20mA 12-bit	24VDC

## Product Details

<b>I/O Expansion</b>	Local or Remote I/Os may be added via expansion port or via CANbus. expands to 512 I/Os (See I/O Expansion Modules- page 28)
<b>Program</b>	Application Memory: Application Logic: 512K • Images: 12MB • Fonts: 1MB
Scan Time	15µ sec per 1K of typical application
Memory Operands	8192 coils, 4096 registers, 512 long integers (32-bit), 256 double words (32-bit unsigned), 64 floats, 384 timers (32-bit), 32 counters Additional non-retainable operands: 1024 X-bits, 512 X-integers, 256 X-long integers, 64 X-double words
Data Tables	120K dynamic RAM data (recipe parameters, datalogs, etc.), up to 256K fixed data
SD Card (Micro)	Store datalogs, Alarm History, Data Tables, Trend data, export to Excel • Back up Ladder, HMI & OS, clone PLCs
Enhanced Features	Trends: graph any value and display on HMI • String Library: instantly switch HMI language
<b>Operator Panel</b>	
Type	TFT LCD • 65,536 colors, 16-bit resolution • Brightness - Adjustable via touchscreen or software
Display	Resolution: 480x272 pixels • Size: 4.3"
Touchscreen	Resistive, Analog
Keys	5 programmable keys.
<b>General</b>	
Power Supply	24VDC, except for V430-J-B1, which is 12/24VDC
Battery	7 years typical at 25°C, battery back-up for all memory sections and RTC
Clock	Real-time clock functions (date and time)
Environment	IP66/IP65/NEMA4X (when panel mounted)
Standard	CE, UL Many of our products are also UL Class 1 Div 2 and GOST certified - please contact Unitronics

<sup>1</sup> In some models certain inputs are adaptable via wiring and software settings, and can function as digital, high-speed, analog, and in certain models as TC or PT100. Adapting requires input pins. This reduces the number of digital inputs. Pin requirements:

• Each high-speed requires 1 or 2 pins according to high-speed mode.  
• Each analog input requires 1 pin.  
• Each TC requires 2 pins per TC input  
• The first PT input requires 3 pins and two additional pins for each additional PT input.

Example: V430-J-RA22 offers 12 digital inputs. Implementing 2 TC inputs requires 4 pins, leaving 8 pins free. Implementing 2 PT inputs uses 5 input pins.

<sup>2</sup> The total number of digital inputs listed includes high-speed and adaptable inputs.  
<sup>3</sup> The total number of digital outputs listed includes high-speed outputs.



# VISION 350™

Advanced PLC integrated with a 3.5" color touchscreen. Includes an onboard I/O configuration, expand up to 512 I/Os

## Features:

### HMI

- 1024 user-designed screens
- 500 images per application
- HMI graphs - color-code Trends
- Built-in alarm screens
- Text String Library - easy localization
- Memory and communication monitoring via HMI - No PC needed

### PLC

- I/O options include high-speed, temperature & weight measurement
- Auto-tune PID, up to 24 independent loops
- Recipe programs and datalogging via Data Tables
- Micro SD card - log, backup, clone & more
- Date & Time-based control

### Communication

- TCP/IP via Ethernet
- Web server: Use built-in HTML pages, or design complex pages to view and edit PLC data via the Internet
- Send e-mail function
- SMS messaging
- GPRS/GSM
- Remote Access utilities
- MODBUS protocol support
- BACnet, KNX, M-bus – via 3rd-party converter
- CANbus: CANopen, UniCAN, SAE J1939 and more
- DF1 Slave
- SNMP Agent V1
- FB Protocol Utility: enables serial or TCP/IP communications with 3rd-party device; barcode readers, frequency converters, etc.
- Ports: supplied with mini-USB programming port and 1 RS232/RS485; 2 ports may be added: 1 Serial/Ethernet/Profibus and 1 CANbus



**V350-J**  
Flat Panel



**V350**  
Classic Panel



**NEW!** Extended temperature range unit, operational temperature between -30°C to 60°C.  
Available with classic or flat panel design  
Extended temperature options also available for Ethernet and CANBus cards.

Classic panel p/n: V350-S-TA24, Flat panel p/n: V350-JS-TA24, CANBus p/n: V100-S-CAN, Ethernet p/n V100-S-ET2

“There were significant cost savings using the Unitronics PLC.”

Justin Butler,  
Senior Electrical Engineer at Energy Plant Solutions

## Vision350™ models - Onboard I/Os

Article	Summary	Inputs <sup>1</sup>				Outputs				Operating Voltage
		Digital <sup>2</sup>	HSC/Shaft-encoder <sup>2</sup>	Analog	Temperature Measurement	Transistor <sup>3</sup>	PWM/HSO <sup>3</sup>	Relay	Analog	
V350-J-B1	V350-35-B1	No onboard I/Os	—	—	—	—	—	—	—	12/24VDC
V350-J-TR20	V350-35-TR20	10 Digital, 2 D/A Inputs <sup>1</sup> 6 Relay Outputs 2 High-speed Transistor Outputs	12	3 200kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	2 npn (2 PTO) 200 kHz max	6	—	24VDC
V350-J-R34	V350-35-R34	20 Digital, 2 D/A Inputs <sup>1</sup> 12 Relay Outputs	22	3 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	—	12	—	24VDC
V350-J-TR34	V350-35-TR34	20 Digital, 2 D/A Inputs <sup>1</sup> 8 Relay, 4 High-speed Transistor Outputs	22	3 200kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	4 npn (3 PTO) 200 kHz max	8	—	24VDC
V350-J-TR6	V350-35-TR6	6 Digital, 2 D/A <sup>1</sup> , 4 Analog Inputs 6 Relay Outputs 2 High-speed Transistor Outputs	8	1 200kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA and 4 0-20mA, 4-20mA 10-bit	—	2 npn (2 PTO) 200 kHz max	6	—	24VDC
V350-J-RA22	V350-35-RA22	8 Digital, 2 D/A, 2 TC/PT100/ Digital Inputs <sup>1</sup> 8 Relay, 2 Analog Outputs	12	1 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 14-bit	2 Thermocouple, PT100	—	8	2 0-10V, 4-20mA 12-bit	24VDC
V350-J-TRA22	V350-35-TRA22	8 Digital, 2 D/A, 2 TC/PT100/ Digital Inputs <sup>1</sup> 4 Relay, 2 Analog, 4 High-Speed Transistor Outputs	12	1 200kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 14-bit	2 Thermocouple, PT100	4 npn (2 PTO) 200 kHz max	4	2 0-10V, 4-20mA 12-bit	24VDC
V350-J-T2	V350-35-T2	10 Digital, 2 D/A Inputs <sup>1</sup> 12 Transistor Outputs	12	3 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	12 pnp 0.5kHz	7	—	24VDC
V350-J-T38	V350-35-T38	20 Digital, 2 D/A Inputs <sup>1</sup> , 16 Transistor Outputs	22	2 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	16 pnp 0.5kHz	7	—	24VDC
V350-J-TA24 V350-S-TA24	V350-35-TA24 V350-JS-TA24	8 Digital, 2 D/A, 2 TC/PT100/ Digital Inputs <sup>1</sup> 10 Transistor, 2 Analog Outputs	12	1 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 14-bit	2 Thermocouple, PT100	10 pnp 0.5kHz	5	2 0-10V, 4-20mA 12-bit	24VDC

## Product Details

I/O Expansion	Local or Remote I/Os may be added via expansion port or via CANbus. Expand up to 512 I/Os (See I/O Expansion Modules- page 28)
Program	Application Logic: 1MB • Images: 8MB • Fonts: 512K
Application Memory	15µ sec per 1K of typical application
Scan Time	8192 coils, 4096 registers, 512 long integers (32-bit), 256 double words (32-bit unsigned), 64 floats, 384 timers (32-bit), 32 counters Additional non-retainable operands: 1024 X-bits, 512 X-integers, 256 X-long integers, 64 X-double words
Memory Operands	120K dynamic RAM data (recipe parameters, datalogs, etc.), up to 256K fixed data
Data Tables	Store datalogs, Alarm History, Data Tables, Trend data, export to Excel • Back up Ladder, HMI & OS, clone PLCs
SD Card (Micro)	Trends: graph any value and display on HMI • String Library: instantly switch HMI language
Enhanced Features	
Operator Panel	
Type	TFT LCD • 65,536 colors, 16-bit resolution • Brightness - Adjustable via touchscreen or software
Display	Resolution: 320 x 240 pixels (QVGA) • Size: 3.5"
Touchscreen	Resistive, Analog
Keys	5 programmable keys. Labeling options - function keys, arrows, or customized
General	
Power Supply	24VDC, except for V350-35-B1, which is 12/24VDC
Battery	7 years typical at 25°C, battery back-up for all memory sections and RTC
Clock	Real-time clock functions (date and time)
Environment	IP66/IP65/NEMA4X (when panel mounted)
Standard	CE, UL Many of our products are also UL Class 1 Div 2 and GOST certified - please contact Unitronics

<sup>1</sup> In some models certain inputs are adaptable via wiring and software settings, and can function as digital, high-speed, analog, and in certain models as TC or PT100. Adapting requires input pins. This reduces the number of digital inputs. Pin requirements:

• Each high-speed requires 1 or 2 pins according to high-speed mode.  
• Each analog input requires 1 pin.  
• Each TC requires 2 pins per TC input  
• The first PT input requires 3 pins, and two additional pins for each additional PT input.

Example: V350-35-RA22 offers 12 digital inputs. Implementing 2 TC inputs requires 4 pins, leaving 8 pins free. Implementing 2 PT inputs uses 5 input pins.

<sup>2</sup> The total number of digital inputs listed includes high-speed and adaptable inputs.  
<sup>3</sup> The total number of digital outputs listed includes high-speed outputs.

# VISION 130™

Palm-size, powerful PLC with built-in, black & white LCD 2.4" graphic display, keypad & onboard I/O configuration, expand up to 256 I/Os

## Features:

### HMI

- 1024 user-designed screens
- 400 images per application
- HMI graphs - color-code Trends
- Built-in alarm screens
- Text String Library - easy localization
- Memory and communication monitoring via HMI - No PC needed

### PLC

- I/O options include high-speed, temperature & weight measurement
- Auto-tune PID, up to 24 independent loops
- Recipe programs and datalogging via Data Tables
- Micro SD card - log, backup, clone & more
- Date & Time-based control

### Communication

- TCP/IP via Ethernet
- Web server: Use built-in HTML pages, or design complex pages to view and edit PLC data via the Internet
- Send e-mail function
- SMS messaging
- GPRS/GSM
- Remote Access utilities
- MODBUS protocol support
- BACnet, KNX, M-bus – via 3rd-party converter
- CANbus: CANopen, UniCAN, SAE J1939 and more
- DF1 Slave
- SNMP Agent V1
- FB Protocol Utility: enables serial or TCP/IP communications with 3rd-party device; barcode readers, frequency converters, etc.
- Ports: supplied with 1 RS232/RS485; 2 ports may be added: 1 Serial/Ethernet/Profibus and 1 CANbus



**V130-J**  
Flat Panel



**V130**  
Classic Panel

“The perfect solution for our need, the Vision130™ is easy to program, user-friendly and backed up with responsive tech support.”

Michael Lamore,  
President of Barrier1

## Vision130™ models - Onboard I/Os

Article	Summary	Inputs <sup>1</sup>				Outputs				Operating Voltage
		Digital <sup>2</sup>	HSC/Shaft-encoder <sup>2</sup>	Analog	Temperature Measurement	Transistor <sup>3</sup>	PWM/HSO <sup>3</sup>	Relay	Analog	
V130-J-B1	V130-33-B1	No onboard I/Os	—	—	—	—	—	—	—	12/24VDC
V130-J-TR20	V130-33-TR20	10 Digital, 2 D/A Inputs <sup>1</sup> 6 Relay Outputs 2 High-speed Transistor Outputs	12	3 200kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	2 nnp (2 PTO) 200 kHz max	6	—	24VDC
V130-J-R34	V130-33-R34	20 Digital, 2 D/A Inputs <sup>1</sup> 12 Relay Outputs	22	3 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	—	12	—	24VDC
V130-J-TR34	V130-33-TR34	20 Digital, 2 D/A Inputs <sup>1</sup> 8 Relay, 4 High-speed Transistor Outputs	22	3 200kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	4 nnp (3 PTO) 200 kHz max	8	—	24VDC
V130-J-TR6	V130-33-TR34	6 Digital, 2 D/A <sup>1</sup> , 4 Analog Inputs 6 Relay Outputs 2 High-speed Transistor Outputs	8	1 200kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA and 4 0-20mA, 4-20mA 10-bit	—	2 nnp (2 PTO) 200 kHz max	6	—	24VDC
V130-J-RA22	V130-33-RA22	8 Digital, 2 D/A, 2 TC/PT100/ Digital Inputs <sup>1</sup> 8 Relay, 2 Analog Outputs	12	1 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 14-bit	2 Thermocouple, PT100	—	8	2 0-10V, 4-20mA 12-bit	24VDC
V130-J-TRA22	V130-33-TRA22	8 Digital, 2 D/A, 2 PT100/ TC/ Digital Inputs <sup>1</sup> 4 Relay, 2 Analog, 4 High-Speed Transistor Outputs	12	1 200kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 14-bit	2 Thermocouple, PT100	4 nnp (2 PTO) 200 kHz max	4	2 0-10V, 4-20mA 12-bit	24VDC
V130-J-T2	V130-33-T2	10 Digital, 2 D/A Inputs <sup>1</sup> 12 Transistor Outputs	12	3 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	12 pnp 7 0.5kHz	—	—	24VDC
V130-J-T38	V130-33-T38	20 Digital, 2 D/A Inputs <sup>1</sup> , 16 Transistor Outputs	22	2 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	16 pnp 7 0.5kHz	—	—	24VDC
V130-J-TA24	V130-33-TA24	8 Digital, 2 D/A, 2 TC/PT100/ Digital Inputs <sup>1</sup> 10 Transistor, 2 Analog Outputs	12	1 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 14-bit	2 Thermocouple, PT100	10 pnp 5 0.5kHz	—	2 0-10V, 4-20mA 12-bit	24VDC

## Product Details

I/O Expansion	Local or Remote I/Os may be added via expansion port or via CANbus. Expand up to 256 I/Os (See I/O Expansion Modules- page 28)
Program	
Application Memory	Application Logic: 512K • Images: 256K • Fonts: 128K
Scan Time	20µ sec per 1K of typical application
Memory Operands	4096 coils, 2048 registers, 256 long integers (32-bit), 64 double words (32-bit unsigned), 24 floats, 192 timers (32-bit), 24 counters Additional non-retainable operands: 1024 X-bits, 512 X-integers, 256 X-long integers, 64 X-double words
Data Tables	120K dynamic RAM data (recipe parameters, datalogs, etc.), up to 256K fixed data
SD Card (Micro)	Store datalogs, Alarm History, Data Tables, Trend data, export to Excel • Back up Ladder, HMI & OS, clone PLCs
Enhanced Features	Trends: graph any value and display on HMI • Built-in Alarm management system • String Library: instantly switch HMI language
Operator Panel	
Type	Graphic STN LCD, white LED backlight
Display	Resolution: 128 x 64 pixels • Size: 2.4"
Keys	20, including 10 user labeled keys (slide kit sold separately)
General	
Power Supply	24VDC, except for V130-33-B1, which is 12/24VDC
Battery	7 years typical at 25°C, battery back-up for all memory sections and RTC
Clock	Real-time clock functions (date and time)
Environment	IP66/IP65/NEMA4X (when panel mounted)
Standard	CE, UL Many of our products are also UL Class 1 Div 2 and GOST certified - please contact Unitronics

<sup>1</sup> In some models certain inputs are adaptable via wiring and software settings, and can function as digital, high-speed, analog, and in certain models as TC or PT100. Adapting requires input pins. This reduces the number of digital inputs. Pin requirements:

• Each high-speed requires 1 or 2 pins according to high-speed mode.  
• Each analog input requires 1 pin.  
• Each TC requires 2 pins per TC input  
• The first PT input requires 3 pins, and two additional pins for each additional PT input.

Example: V130-33-RA22 offers 12 digital inputs. Implementing 2 TC inputs requires 4 pins, leaving 8 pins free. Implementing 2 PT inputs uses 5 input pins.

<sup>2</sup> The total number of digital inputs listed includes high-speed and adaptable inputs.  
<sup>3</sup> The total number of digital outputs listed includes high-speed outputs.



# VISION 120™

Full-function PLC with built-in, monochrome graphic LCD display, keypad & onboard I/O configuration, expand up to 256 I/Os



V120

## HMI

- Up to 255 user-designed screens
- Hundreds of images per application
- HMI graphs & Trends
- Memory and communication monitoring via HMI - No PC needed

## PLC

- I/O options include high-speed, temperature & weight measurement
- Auto-tune PID, up to 12 independent loops
- Recipe programs and datalogging via Data Tables
- Date & Time-based control
- 2 RS232/RS485 built-in ports

## Communication

- SMS messaging
- GPRS/GSM
- Remote Access utilities
- MODBUS protocol support
- BACnet, KNX, M-bus – via 3rd-party converter
- CANbus: CANopen, UniCAN (in C models only)
- FB Protocol Utility: enables serial with 3rd-party device—barcode readers, frequency converters, etc.

## I/O Expansion Modules

Article	Summary	Inputs <sup>1</sup>				Outputs				Operating Voltage
		Digital <sup>2</sup>	HSC/Shaft-encoder <sup>2</sup>	Analog	Temperature Measurement	Transistor <sup>3</sup>	PWM/HZO <sup>3</sup>	Relay	Analog	
V120-22-R1	10 Digital, 1 Analog Inputs 6 Relay Outputs	10	3 10kHz, 32-bit	1 0-10V, 0-20mA, 4-20mA 10-bit	—	—	—	6	—	12/24VDC
V120-22-R2C	10 Digital, 2 Analog Inputs 6 Relay Outputs	10	3 10kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	—	—	6	—	12/24VDC
V120-22-R6C	6 Digital, 6 Analog Inputs 6 Relay Outputs	6	1 10kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA and 4 0-20mA, 4-20mA 10-bit	—	—	—	6	—	24VDC
V120-22-R34	20 Digital, 2 D/A Inputs <sup>1</sup> 12 Relay Outputs	22	3 10kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	—	—	12	—	24VDC
V120-22-T1	12 Digital Inputs 12 Transistor Outputs	12	2 10kHz, 32-bit	—	—	12 pnp	—	—	—	12/24VDC
V120-22-T38	22 Digital Inputs 16 Transistor Outputs	22	2 10kHz, 32-bit	—	—	16 pnp	—	—	—	24VDC
V120-22-T2C	10 Digital, 2 D/A Inputs <sup>1</sup> 12 Transistor Outputs	12	3 10kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	12 pnp	—	—	—	12/24VDC
V120-22-UN2	10 Digital, 2 D/A/TC/PT100 Inputs <sup>1</sup> 12 Transistor Outputs	12	2 10kHz, 32-bit	2 Thermocouple, PT100, 0-10V, 0-20mA, 4-20mA 14-bit	—	12 pnp	2 0.5kHz	—	—	12/24VDC
V120-22-UA2	10 Digital, 2 D/A/TC1 Inputs 10 Transistor, 2 Analog Outputs	12	1 10kHz, 32-bit	2 Thermocouple, 0-10V, 0-20mA, 4-20mA 14-bit	—	10 pnp	—	—	2 0-10V, 4-20mA 12-bit	24VDC
V120-22-RA22	8 Digital, 2 D/A, 2 TC/PT100/Digital Inputs <sup>1</sup> 8 Relay, 2 Analog Outputs	12	1 10kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 14-bit	2 Thermocouple, PT100	—	—	8	2 0-10V, 4-20mA 12-bit	24VDC

## Product Details

I/O Expansion	Local or Remote I/Os may be added via expansion port or via CANbus. Expands 256 I/Os (See I/O Expansion Modules - page 28)
Program	
Application Memory	448K (virtual) Ladder code capacity
Memory Scan Time	48µ sec per 1K of typical application
Operands	4096 coils, 2048 registers, 256 long integers (32-bit), 64 double words (32-bit unsigned), 24 floats, 192 timers (32-bit), 24 counters
Data Tables	120K dynamic RAM data (recipe parameters, datalogs, etc.), up to 256K fixed data
Operator Panel	
Type	Graphic STN LCD
Display	Resolution: 128 x 64 pixels • Size: 2.4"
Keys	16 keys
General	
Power Supply	V120-22-R1 / R2C / T1 / T2C / UN2 : 12/24VDC • V120-22-R6C / R34 / T38 / UA2 / RA22 : 24VDC
Battery	7 years typical at 25°C, battery back-up for all memory sections and RTC
Clock	Real-time clock functions (date and time)
Environment	IP65/NEMA4X (when panel mounted)
Standard	CE, UL Many of our products are also UL Class 1 Div 2 and GOST certified - please contact Unitronics

<sup>1</sup> In some models certain inputs are adaptable via wiring and software settings, and can function as digital, analog, and in certain models as TC or PT100. Adapting requires input pins. This reduces the number of digital inputs. Pin requirements:

- Each high-speed requires 1 or 2 pins according to high-speed mode.
- Each analog input requires 1 pin.
- Each TC requires 2 pins per TC input
- The first PT input requires 3 pins, and two additional pins for each additional PT input.

Example: V120-22-UA2 offers 12 digital inputs. Implementing 2 TC inputs requires 4 pins, leaving 8 pins free. Implementing 2 PT inputs uses 5 input pins.

<sup>2</sup> The total number of digital inputs listed includes high-speed and adaptable inputs.

<sup>3</sup> The total number of digital outputs listed includes high-speed outputs

# VISION 200™

Advanced PLCs with an integrated graphic or touch operator panel. Snap in I/Os to create an All-in-One, expand up to 316 I/Os

## HMI

- Up to 255 user-designed screens
- Hundreds of images per application
- HMI graphs & Trends
- Virtual alpha-numeric keypad (in V290 & V530)
- Memory and communication monitoring via HMI - No PC needed

## PLC

- I/O options include high-speed, temperature & weight measurement
- Auto-tune PID, up to 12 independent loops
- Recipe programs and datalogging via Data Tables
- Date & Time-based control

## Communication

- SMS messaging
- GPRS/GSM
- Remote Access utilities
- MODBUS protocol support
- BACnet, KNX, M-bus – via 3rd-party converter
- CANbus: CANopen, UniCAN (in C models only)
- FB Protocol Utility: enables serial or TCP/IP communications with 3rd-party device; barcode readers, frequency converters, etc.
- Ports: supplied with 1 RS232, 1 RS232/RS485 and 1 CANbus; 1 port may be added for serial/Ethernet

	V230™	V280™	V290™	V530™
Image				
Article Number	V230-13-B20B	V280-18-B20B	V290-19-B20B	V530-53-B20B
I/O Options	Plug these modules directly into the back of the Vision unit to create a self-contained PLC with up to 62 I/Os. Inputs may include Digital, Analog and Temperature Measurement. Outputs may include Transistor, Relay or Analog (sold separately)			
I/O Expansion	Local or remote I/Os may be added via expansion port or via CANbus. Expand up to 316 I/Os (See I/O Expansion Modules - page 28)			
Program	1MB			
Application Memory	1MB			
Scan Time	30µsec per 1K of typical application			
Operands	4096 coils, 2048 registers, 256 long integers (32 bit), 64 double words (32 bit unsigned), 24 memory floats, 192 timers, 24 counters			
Data Tables	120K dynamic RAM data (recipe parameters, datalogs, etc.), up to 192K fixed data			
Operator Panel				
Type	STN LCD	Black & White FSTN LCD		
Display Resolution & Size	128 x 64 pixels 3.2"	320 x 240 pixels (QVGA), 4.7" active area	320 x 240 pixels (QVGA), 5.7" active area	
Touch Screen	—	Resistive, Analog		
Keys	24 user labeled keys	27 user labeled keys	Virtual keyboard	
General				
Power Supply	12/24VDC			
Battery Back-up	7 years typical at 25°C, back-up for all memory sections and real-time clock (RTC)			
Environment	IP65/NEMA4X (when panel mounted)			
Standard	CE, UL Many of our products are also UL Class 1 Div 2 and GOST certified - please contact Unitronics			

Full-function PLC with built-in, high resolution full-color touch screen & onboard I/O configuration. Great look, incredible price

## Features:

### HMI

- Display: Color touch-screen  
3.5" - 320 x 240, 4.3" - 480 x 272, 7" - 800 x 480
- 24 user-designed screens and 500 images per application
- HMI graphs - color-code Trends
- Built-in alarm screens
- Text String Library - easy localization
- Memory and communication monitoring via HMI - No PC needed

### PLC

- I/O options: Digital, Analog, including High-speed
- Auto-tune PID, 2 independent loops
- Recipe programs and data logging via Data Tables
- Date & Time-based control

### Communication

- TCP/IP via Ethernet
- Send e-mail function
- SMS messaging
- GPRS/GSM
- Remote Access utilities
- MODBUS protocol supported
- BACnet, KNX, M-bus – via 3rd-party converter
- CANbus: CANopen, UniCAN, SAE J1939, and more
- DF1 Slave
- Programming Port: RS232 for 3.5" model, USB for 4.3" & 7"
- 2 ports may be added: 1 Serial (RS232/RS485)/ Ethernet & 1 CANbus



**SAMBA 3.5"**



**SAMBA 4.3"**



**SAMBA 7"**

“It really enhanced our product’s look and flexibility.”

Ralph Hannmann,  
President of Alyan Pump Company

## Samba™ models - Onboard I/Os

Article	Summary	Inputs <sup>1</sup>				Outputs				Operating Voltage
		Digital <sup>2</sup>	HSC/Shaft-encoder <sup>2</sup>	Analog	Temperature Measurement	Transistor <sup>3</sup>	PWM/HSO <sup>3</sup>	Relay	Analog	
SM35-J-R20 SM43-J-R20 SM70-J-R20	10 Digital, 2 D/A Inputs <sup>4</sup> , 8 Relay Outputs	12	1 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	—	—	8	—	24VDC
SM35-J-T20 SM43-J-T20 SM70-J-T20	10 Digital, 2 D/A Inputs, 8 Transistor Outputs	12	3 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	8 pnp	7 0.5kHz	—	—	24VDC
SM35-J-RA22 SM43-J-RA22 SM70-J-RA22	12 Digital, 1 HSC/Shaft- encoder, 2 AI, 2 PT100/TC, 8 Relay, 2 AO	12	1 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 12/14-bit	2 PT100/TC	—	—	8	0-10V, 4-20mA <sup>2</sup> , 12-bit	24VDC
SM35-J-TA22 SM43-J-TA22 SM70-J-TA22	12 Digital, 1 HSC/Shaft- encoder, 2 AI, 2 PT100/TC, 8 Transistor, 2 AO	12	1 30kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 12/14-bit	2 PT100/TC	8 pnp	5 0.5kHz	—	0-10V, 4-20mA, 12-bit	24VDC

## Product Details

<b>I/O Expansion</b>	Remote I/Os via CANbus
<b>Program</b>	<p>SM35: Application Logic: 112kb • Images: <b>1 MB</b> • Fonts: 512 kb</p> <p>SM43: Application Logic: 176kb • Images: <b>2 MB</b> • Fonts: 512 kb</p> <p>SM70: Application Logic: 176kb • Images: <b>5 MB</b> • Fonts: 512 kb</p>
Scan Time	15µs per 1K of typical application
Memory Operands	512 coils, 256 registers, 32 long integers (32-bit), 32 double words (32-bit unsigned), 24 floats, 32 timers (32-bit), 16 counters. Additional non-retainable operands: 64 X-bits, 32 X-integers, 16 X-long integers, 16 X-double words
Data Tables	32K dynamic RAM data (recipe parameters, datalogs, etc.), up to 16K fixed data
SD Card	—
Enhanced Features	Trends: graph any value and display on HMI • String Library: instantly switch HMI language
<b>Operator Panel</b>	
Type & Colors	TFT LCD • 65,536 colors • 16 bit resolution • Brightness - Adjustable via touchscreen or software
Display	Resolution: 320 x 240 pixels • Size: 3.5" (QVGA) Resolution: 480 x 272 pixels • Size: 4.3" Resolution: 800 x 480 pixels • Size: 7"
Touchscreen	Resistive, Analog
Keys	Displays virtual keyboard when the application requires data entry
<b>General</b>	
Power Supply	24VDC
Battery	7 years typical at 25°C, battery back-up for RTC and system data, including variable data
Clock	Real-time clock functions (date and time)
Environment	NEMA4X/IP66/IP65 (when panel mounted)
Standard	CE, UL Many of our products are also UL Class 1 Div 2 and GOST certified - please contact Unitorics

<sup>1</sup> In some models certain inputs are adaptable via wiring and software settings, and can function as digital or analog. Adapting requires input pins. This reduces the number of digital inputs. Pin requirements:  
• Each analog input requires 1 pin.  
Example: SM35-J-R20 offers 12 digital inputs. Implementing 2 analog inputs requires 2 pins, leaving 10 pins free.

<sup>2</sup> The total number of digital inputs listed includes high-speed and adaptable inputs.  
<sup>3</sup> The total number of digital outputs listed includes high-speed outputs.  
<sup>4</sup> When selecting NPN for the digital inputs, the 2 Analog inputs cannot be used.



An all-in-one unit that is as affordable as a "smart relay" - full-function PLC combined with a textual HMI and keypad, with up to 40 onboard I/Os.

## Meet the New Jazz 2 series Advantages:

- Faster performance - 30x faster
- Double the memory
- Built-in mini-USB programming port
- Ethernet via Add-on Port
- Fully compatible with current Jazz projects

## Features:

### HMI

- Up to 60 user-designed screens
- Multilingual: supports over 15 languages and 20 graphic symbols

### PLC

- Ladder Logic programming ensures functional flexibility
- Functions include: interrupt, loops, math, store & compare functions
- Date & Time-based control
- High-speed counters & PWM outputs
- Direct temperature inputs
- Auto-tune PID, up to 4 loops

### Communication

- SMS messaging via GSM
- Remote Access utilities
- PC access via MODBUS or OPC server
- Supports MODBUS protocol



**Jazz®-J**  
Flat Panel



**Jazz®**  
Classic Panel

“The Unitronics PLC provided the perfect solution for our need for control. Whether it was safety, mechanical or functionality, the Jazz had it all.”

Peter Spano,  
President of GTS

## Jazz™ models - Onboard I/Os

Article	Summary	Inputs <sup>1</sup>				Outputs				Operating Voltage	
		Digital <sup>2</sup>	HSC/Shaft-encoder <sup>2</sup>	Analog	Temperature Measurement	Transistor <sup>3</sup>	PWM/HSO <sup>3</sup>	Relay	Analog		
JZ20-R10 JZ20-J-R10	6 Digital Inputs 4 Relay Outputs	6	2 10kHz, 16-bit	—	—	—	—	4	—	24VDC	
JZ20-R16 JZ20-J-R16	6 Digital, 2 D/A, 2 Analog Inputs <sup>1</sup> 6 Relay Outputs	8		2 0-10V 10 or 12-bit 2 0-20mA, 4-20mA 10 or 12-bit	—	—	—	6	—	24VDC	
JZ20-J-R16HS	6 Digital, 3 HSC/Shaft-encoder, 2 A/D, 2 AI, 6 Relay outputs	8		2 0-10V 10 or 12-bit 2 0-20mA, 4-20mA 10-bit	—	—	—	6	—	24VDC	
JZ20-R31 JZ20-J-R31	16 Digital, 2 D/A, 2 Analog Inputs <sup>1</sup> 11 Relay Outputs	18		2 0-10V 10 or 12-bit 2 0-20mA, 4-20mA 10-bit	—	—	—	11	—	24VDC	
JZ20-T10 JZ20-J-T10	6 Digital Inputs 4 Transistor Outputs	6		—	—	—	4 pnp	—	—	24VDC	
JZ20-T18 JZ20-J-T18	6 Digital, 2 D/A, 2 Analog Inputs <sup>1</sup> 8 Transistor Outputs	8		2 0-10V 10-bit 2 0-20mA, 4-20mA 10-bit	—	—	8 pnp	—	—	24VDC	
JZ20-J-T20HS	6 Digital, 3 HSC/Shaft-encoder, 2 A/D, 2 AI, 10 Transistor outputs	8		2 0-10V 10-bit	—	—	8 pnp	2 32kHz	—	24VDC	
JZ20-T40 JZ20-J-T40	16 Digital, 2 D/A, 2 Analog Inputs <sup>1</sup> 20 Transistor Outputs	18		2 0-10V 10-bit 2 0-20mA, 4-20mA 10-bit	—	—	20 pnp	—	—	24VDC	
Z20-UA24 JZ20-J-UA24	9 Digital Inputs, 1 HSC, 2 A/D, 2 AI, 2 TC/PT100, 5 Relay Outputs, 2 Transistor Outputs, 2 AO	11		2 10kHz, 16-bit	2 0-20mA 4-20mA 2 0-10 VDC	2 Thermocouple, PT100	2 pnp	2	5	2 +/-10V, 4 -20mA 12-bit	24VDC
JZ10-11-UN20 JZ10-J-UN20	9 Digital, 2 D/A, 1 Analog 1 TC/PT100 Inputs <sup>1</sup> 5 Relay 2 Transistor Outputs	11		1 5kHz, 16-bit	2 0-10V 10-bit 1 0-20mA, 4-20mA 10-bit	1 Thermocouple, PT100	2 pnp	2	5	—	24VDC
JZ10-11-PT15 JZ10-J-PT15	3 Digital, 3 D/A, 3 PT1000/Ni1000 Inputs <sup>1</sup> 3 Relay 1 Transistor Outputs	6	1 5kHz, 16-bit	3 0-10V <sup>2</sup> 10-bit	3 PT1000/Ni1000	1 pnp	1	5	—	24VDC	

Jazz 2 -  
Soon to come

## Product Details

<b>Program</b>	
Ladder Code Memory	JZ20: 48K • JZ10: 24K
Memory Operands	256 coils, 256 registers, 64 timers
<b>Operator Panel</b>	
Type	STN LCD
Display	2 lines x 16 characters
Touchscreen	16 keys, 10 of which may be user-labeled
<b>General</b>	
Power Supply	24VDC
Battery	10 years typical at 25°C, battery back-up for RTC and system data, including variable data
Clock	Real-time clock functions (date and time)
Environment	NEMA4X/IP65 (when panel mounted)
Standard	CE, UL Many of our products are also UL Class 1 Div 2 and GOST certified - please contact Unitronics
Programming Port	JZ20: On Board Mini USB • JZ10: Article No.: JZ-PRG sold separately
<b>Communication</b>	
Serial	RS232/RS485 Add-on port (isolated), Article No.: JZ-RS4 sold separately
Ethernet	JZ20: Ethernet add-on port, Article No.: MJ20-ET1 sold separately • JZ10: Not supported

<sup>1</sup> In some models certain inputs are adaptable, and can function as either digital or analog. Adapting requires input pins. This reduces the number of digital inputs. Pin requirements: Each analog input requires 1 pin.

<sup>2</sup> Note that the high-speed inputs are included in the total number of digital inputs

<sup>3</sup> Note that the high-speed outputs are included in the total number of npn/pnp digital outputs

<sup>4</sup> In order to download applications and enable communications, install Jazz® with the appropriate Add-on Module. JZ20 can be programmed via built-in USB device port.

## Add-on modules and accessories

COM Port kit	Ethernet Communication Port	Program Cloner module	Keypad Slide kit
RS232/RS485 Add-on port (isolated) Article No.: JZ-RS4	Ethernet add on port <b>Supported by Jazz® 2 series only</b> Article No.: MJ20-ET1*	Copy applications from PLC to PLC Article No.: MJ20-MEM1	Customize the Jazz® keypad to your application Article No.: MJ20-JZ-SL1

\* Not yet UL certified

# M91™

An affordable All-in-One: a smart PLC with a textual HMI and keyboard, plus an onboard I/O configuration, expand up to 150 I/Os.

## Features:

### HMI

- Up to 80 user-designed screens
- Multilingual: supports over 15 languages and 20 graphic symbols
- Scroll between pre-programmed recipes/menus
- Memory and communication monitoring via HMI - No PC needed

### PLC

- Shaft-encoder inputs and PWM outputs
- Direct temperature inputs
- Auto-tune PID, up to 4 loops
- Date & Time-based control
- Database
- Print utilities
- Full source upload

### Communication

- SMS messaging via GSM
- Remote access utilities
- PC access via MODBUS or OPC server
- Supports MODBUS protocol
- CANBus (in C models only)
- User-defined ASCII strings, enable communication with external devices
- RS232/RS485 built-in port



M91



## M91™ models - Onboard I/Os

Article	Summary	Inputs <sup>1</sup>				Outputs				Operating Voltage
		Digital <sup>2</sup>	HSC/Shaft-encoder <sup>2</sup>	Analog	Temperature Measurement	Transistor <sup>3</sup>	PWM/HSO <sup>3</sup>	Relay	Analog	
M91-2-R1	10 Digital, 1 Analog Inputs 6 Relay Outputs	10	3 10kHz, 32-bit	1 0-10V, 0-20mA, 4-20mA 10-bit	—	—	—	6	—	12/24VDC
M91-2-R2C	10 Digital, 2 Analog Inputs 6 Relay Outputs	10	3 10kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	—	—	6	—	12/24VDC
M91-2-R6C	6 Digital, 6 Analog Inputs 6 Relay Outputs	6	1 10kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 4 0-20mA, 4-20mA 10-bit	—	—	—	6	—	24VDC
M91-2-R34	20 Digital, 2 D/A Inputs <sup>1</sup> 12 Relay Outputs	22	3 10kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	—	—	12	—	24VDC
M91-2-T1	12 Digital Inputs 12 Transistor Outputs	12	2 10kHz, 32-bit	—	—	12 pnp	2 0.5kHz	—	—	12/24VDC
M91-2-T38	22 Digital Inputs 16 Transistor Outputs	22	2 10kHz, 32-bit	—	—	16 pnp		—	—	24VDC
M91-2-T2C	10 Digital, 2 D/A Inputs <sup>1</sup> 12 Transistor Outputs	12	3 10kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 10-bit	—	12 pnp		—	—	12/24VDC
M91-2-UN2	10 Digital, 2 D/A/ PT100/TC Inputs <sup>1</sup> 12 Transistor Outputs	12	2 10kHz, 32-bit	2 Thermocouple, PT100, 0-10V, 0-20mA, 4-20mA 14-bit	—	12 pnp		—	—	12/24VDC
M91-2-UA2	10 Digital, 2 D/A/TC Inputs <sup>1</sup> 10 Transistor, 2 Analog Outputs	12	1 10kHz, 32-bit	2 Thermocouple, 0-10V, 0-20mA, 4-20mA 14-bit	—	10 pnp	—	2 0-10V, 4-20mA 12-bit	24VDC	
M91-2-RA22	8 Digital, 2 D/A, 2 PT100/ TC/Digital Inputs <sup>1</sup> 8 Relay, 2 Analog Outputs	12	1 10kHz, 32-bit	2 0-10V, 0-20mA, 4-20mA 14-bit	2 Thermocouple, PT100	—	—	8	2 0-10V, 4-20mA 12-bit	24VDC

## Product Details

<b>I/O Expansion</b>	I/Os may be added via expansion port. expands 150 I/Os
<b>Program</b>	
Application Memory	36K (virtual) Ladder code capacity
Memory Operands	256 coils, 256 registers, 64 timers
Database	1024 integers, (indirect access)
<b>Operator Panel</b>	
Type	STN LCD
Display Size	2 lines x 16 characters
Keys	15 keys
<b>General</b>	
Power Supply	M91-2-R1 / R2C / T1 / T2C / UN2 : 12/24VDC • M91-2-R6C / R34 / T38 / UA2 / RA22 : 24VDC
Battery	7 years typical at 25°C, battery back-up for all memory sections and RTC
Clock (RTC)	Real-time clock functions (date and time)
Environment	IP65/NEMA4X (when panel mounted)
Standard	CE, UL Many of our products are also UL Class 1 Div 2 and GOST certified - please contact Unitronics

<sup>1</sup> In some models certain inputs are adaptable via wiring and software settings, and can function as digital, high-speed, analog and in certain models as TC or PT100. Adapting requires input pins. This reduces the number of digital inputs. Pin requirements:

• Each high-speed requires 1 or 2 pins according to high-speed mode.  
• Each analog input requires 1 pin.  
• Each TC requires 2 pins per TC input  
• The first PT input requires 3 pins, and two additional pins for each additional PT input.

Example: V91-2-UA2 offers 12 digital inputs. Implementing 2 TC inputs requires 4 pins, leaving 8 pins free. Implementing 2 PT inputs uses 5 input pins.

<sup>2</sup> The total number of digital inputs listed includes high-speed and adaptable inputs.

<sup>3</sup> The total number of digital outputs listed includes high-speed outputs.



# I/O Expansion Modules

Expand your system with local or remote I/O expansion modules.

Vision series support both local & remote I/O modules. M91 supports local modules only.

Expansion Modules Article	Inputs						Outputs				Operating Voltage
	Digital <sup>1</sup>	HSC <sup>2</sup>	Analog	Temperature Measurement	Weight Measurement	Transistor <sup>5</sup>	PWM/HSO <sup>6</sup>	Relay	Analog		
IO-DI8-T08	8 pnp/npn	1 5kHz 16-bit	—	—	—	8 pnp	—	—	—	24VDC <sup>9</sup>	
IO-DI8-R04	8 pnp/npn	1 5kHz 16-bit	—	—	—	—	—	4	—	24VDC <sup>9</sup>	
IO-DI8-R08	8 pnp/npn	1 5kHz 16-bit	—	—	—	—	—	8	—	24VDC <sup>9</sup>	
EX90-DI8-R08 <sup>3</sup>	8 pnp	1 5kHz 16-bit	—	—	—	—	—	8	—	24VDC	
IO-DI16	16 pnp/npn	1 5kHz 16-bit	—	—	—	—	—	—	—	24VDC <sup>9</sup>	
IO-T016	—	—	—	—	—	16 pnp	—	—	—	24VDC	
IO-R08	—	—	—	—	—	—	—	8	—	24VDC <sup>9</sup>	
IO-R016	—	—	—	—	—	—	—	16	—	24VDC <sup>9</sup>	
IO-DI8ACH	8 AC	—	—	—	—	—	—	—	—	110/220 VAC	
IO-AI4-A02	—	—	4 0-10V, 0-20mA, 4-20mA 12-bit	—	—	—	—	—	2 ±10V 12-bit+sign, 0-20mA, 4-20mA 12-bit	24VDC	
IO-PT400	—	—	—	4 PT100/NH100/NH120	—	—	—	—	—	Not relevant	
IO-PT4K	—	—	—	4 PT1000/NH1000	—	—	—	—	—	Not relevant	
IO-A06X	—	—	—	—	—	—	—	—	6 (Isolated) 0-10V, 0-20mA, 4-20mA 12-bit	24VDC	
IO-LC1	1 pnp	—	—	—	1 Loadcell / Strain gauge	2 pnp	—	—	—	24VDC	
IO-LC3	1 pnp	—	—	—	3 Loadcell / Strain gauge	2 pnp	—	—	—	24VDC	
IO-ATC8	—	—	8 Thermocouple, 0-10V, 0-20mA, 4-20mA 14-bit	—	—	—	—	—	—	Not relevant	
IO-AI8	—	—	8 0-10V, 0-20mA, 4-20mA 14-bit	—	—	—	—	—	—	Not relevant	
IO-D16A3-R016	16 pnp/npn	2 30kHz 16/32-bit <sup>3</sup>	3 0-20mA, 4-20mA 10-bit	—	—	—	—	16	—	24VDC	
IO-D16A3-T016	16 pnp/npn	1 30kHz 16/32-bit <sup>3</sup>	3 0-20mA, 4-20mA 10-bit	—	—	15 pnp, 1 pnp/npn	1 pnp 0.5kHz npn 50kHz	None	—	24VDC	
EX-D16A3-R08 <sup>7</sup>	16 pnp/npn	2 30kHz 16/32-bit <sup>3</sup>	3 0-20mA, 4-20mA 10-bit	—	—	None	None	8	—	24VDC	
EX-D16A3-T016 <sup>7</sup>	16 pnp/npn	1 30kHz 16/32-bit <sup>3</sup>	3 0-20mA, 4-20mA 10-bit	—	—	15 pnp, 1 pnp/npn	1 pnp 0.5kHz npn 50kHz	None	—	24VDC	
High-speed Remote I/O Module	EXF-RC15 <sup>2,4</sup>	9 pnp/npn	3 200kHz 32-bit	—	—	4 npn	4 (up to 3 PTO)	2	—	24VDC	

## I/O Expansion Module Adapters

I/O Expansion Module Adapters	Article	Description
	EX-A2X <sup>1</sup>	Local I/O module adapter, Galvanic isolation. Up to 8 modules may be Connected to a single PLC <sup>1</sup> Supports both 12/24 VDC
	EX-RC1 <sup>1,4</sup>	Remote I/O module adapter, via CANbus. Multiple adapters may be connected to a single PLC, with up to 8 modules to each adapter <sup>1</sup> . Supports both 12/24 VDC.

- Number of supported I/Os & I/O modules varies according to module.
- The EXF-RC15 functions as a node in a Vision UniCAN network and connects to the Vision controller via CANbus and programmed in VisiLogic. The EXF-RC15 cannot be extended as regular I/O unit. High-speed inputs are configurable as either high-speed counter (HSC) or shaft-encoder.
- The EX90 is housed in an open casing. Only one EX90 can be connected per PLC, as a single expansion module; Expansion adapter not required.
- Supported by Vision series. Not supported by M91 series.
- The total number of digital inputs listed includes high-speed inputs. Example: the IO-D16A3-T016 offers a total of 16 pnp/npn inputs. You can configure 14 as a HSC and 15 as a Counter reset; this reduces the available number of digital inputs to 14.
- The total number of digital outputs listed includes high-speed outputs. Example: the IO-D16A3-T016 offers a total of 16 transistor outputs. You can configure 1 to High-speed output, reducing the number of available digital outputs to 15.
- Functions as local adapter. Can support up to 7 I/O modules.
- 16-bit or 32-bit, depending on the PLC.
- Also available as 12VDC – contact us for part number.

# Snap-in I/O Modules



Plug a Snap-in module directly into the back of a Vision PLC. Compatible with all V200, V500, V1040 and V1210 Vision series models.

Snap-in I/O Article	Inputs				Outputs				Operating Voltage
	Digital (isolated) <sup>1</sup>	HSC/Shaft-encoder <sup>1</sup>	Analog	Temperature Measurement	Transistor (isolated) <sup>2</sup>	PWM/HSO <sup>2</sup>	Relay	Analog	
V200-18-E1B	16 pnp/npn	2 10kHz 32-bit	3 0-10 V, 0-20mA, 4-20mA 10-bit	—	4 pnp/npn	2 pnp 0.5kHz npn 50kHz	10	—	24VDC
V200-18-E2B	16 pnp/npn	2 10kHz 32-bit	2 0-10 V, 0-20mA, 4-20mA 10-bit	—	4 pnp/npn	2 pnp 0.5kHz npn 50kHz	10	2 0-10 V, 0-20mA, 4-20mA 12-bit	24VDC
V200-18-E3XB	18 pnp/npn	2 10kHz 32-bit	4 (Isolated) Thermocouple, PT100, 0-10V, 0-20mA, 4-20mA 14-bit	—	2 pnp/npn	2 pnp 0.5kHz npn 50kHz	15	4 (Isolated) 0-10 V, 4-20mA 12-bit	24VDC
V200-18-E4XB	18 pnp/npn	2 10kHz 32-bit	4 (Isolated) Thermocouple, PT100, 0-10V, 0-20mA, 4-20mA 14-bit	—	15 pnp, 2 npn/npn	2 pnp 0.5kHz npn 50kHz	—	4 (Isolated) 0-10 V, 4-20mA 12-bit	24VDC
V200-18-E5B	18 pnp/npn	2 10kHz 32-bit	3 0-10 V, 0-20mA, 4-20mA 10-bit	—	15 pnp, 2 npn/npn	2 pnp 0.5kHz npn 50kHz	—	—	24VDC
V200-18-E6B	18 pnp/npn	2 10kHz 32-bit	2 Thermocouple, PT100, 0-10V, 0-20mA, 4-20mA 14-bit 3 0-10V, 0-20mA, 4-20mA 10-bit	—	2 pnp/npn	2 pnp 0.5kHz npn 50kHz	15	2 (Isolated) 0-10 V, 4-20mA 12-bit	24VDC
V200-18-E46B	18 pnp/npn	2 10kHz 32-bit	6 0-10 V, 0-20mA, 4-20mA 14-bit 3 0-10 V, 0-20mA, 4-20mA 10-bit	—	2 pnp/npn	2 pnp 0.5kHz npn 100kHz	15	2 (Isolated) 0-10 V, 4-20mA 12-bit	24VDC
V200-18-E62B <sup>3</sup>	30 pnp/npn	2 10kHz 32-bit	2 0-10 V, 0-20mA, 4-20mA 10-bit	—	28 pnp, 2 npn/npn	2 pnp 0.5kHz npn 100kHz	—	—	24VDC

- The total number of digital inputs listed includes high-speed inputs.
- The total number of digital outputs listed includes high-speed outputs.
- Not yet UL certified

## Additional COM Modules

Enhance Vision's communication capabilities<sup>1</sup>

Vision Model	Ethernet	RS232/RS485	Isolated RS232/RS485	CANbus	Profibus
SAMBA	V100-17-ET2	V100-17-RS4	V100-17-RS4X	V100-17-CAN	—
V130, V350, V430	V100-17-ET2, V100-S-ET2 <sup>2</sup>	V100-17-RS4	V100-17-RS4X	V100-17-CAN, V100-S-CAN <sup>2</sup>	V100-17-PB1
V200, V500, V1040, V1210 <sup>1</sup>	V200-19-ET2	V200-19-RS4	V200-19-RS4-X	Included	—
V700	Included	V100-17-RS4	V100-17-RS4X	V100-17-CAN	V100-17-PB1

- V200/V500/V1040/V1210: 1 optional port for serial or Ethernet, V130/V350: 1 optional port for serial or Ethernet & 1 optional port for CANbus/ Profibus.
- Extended temperature cards, operational temperature : -30°C to 60°C



## DIN-rail Power Supplies


UAP-24V24W	UAP-24V60W	UAP-24V96W
24W 24V 1A	60W 24V 2.5A	96W 24V 4A

## GSM

GSM-KIT-17J-3G
KIT, MODEM GPRS, CINTERION, EHS6T

# Unitronics Industrial Automation Solution

Collect & communicate data.  
Display, access, and remotely control your application.

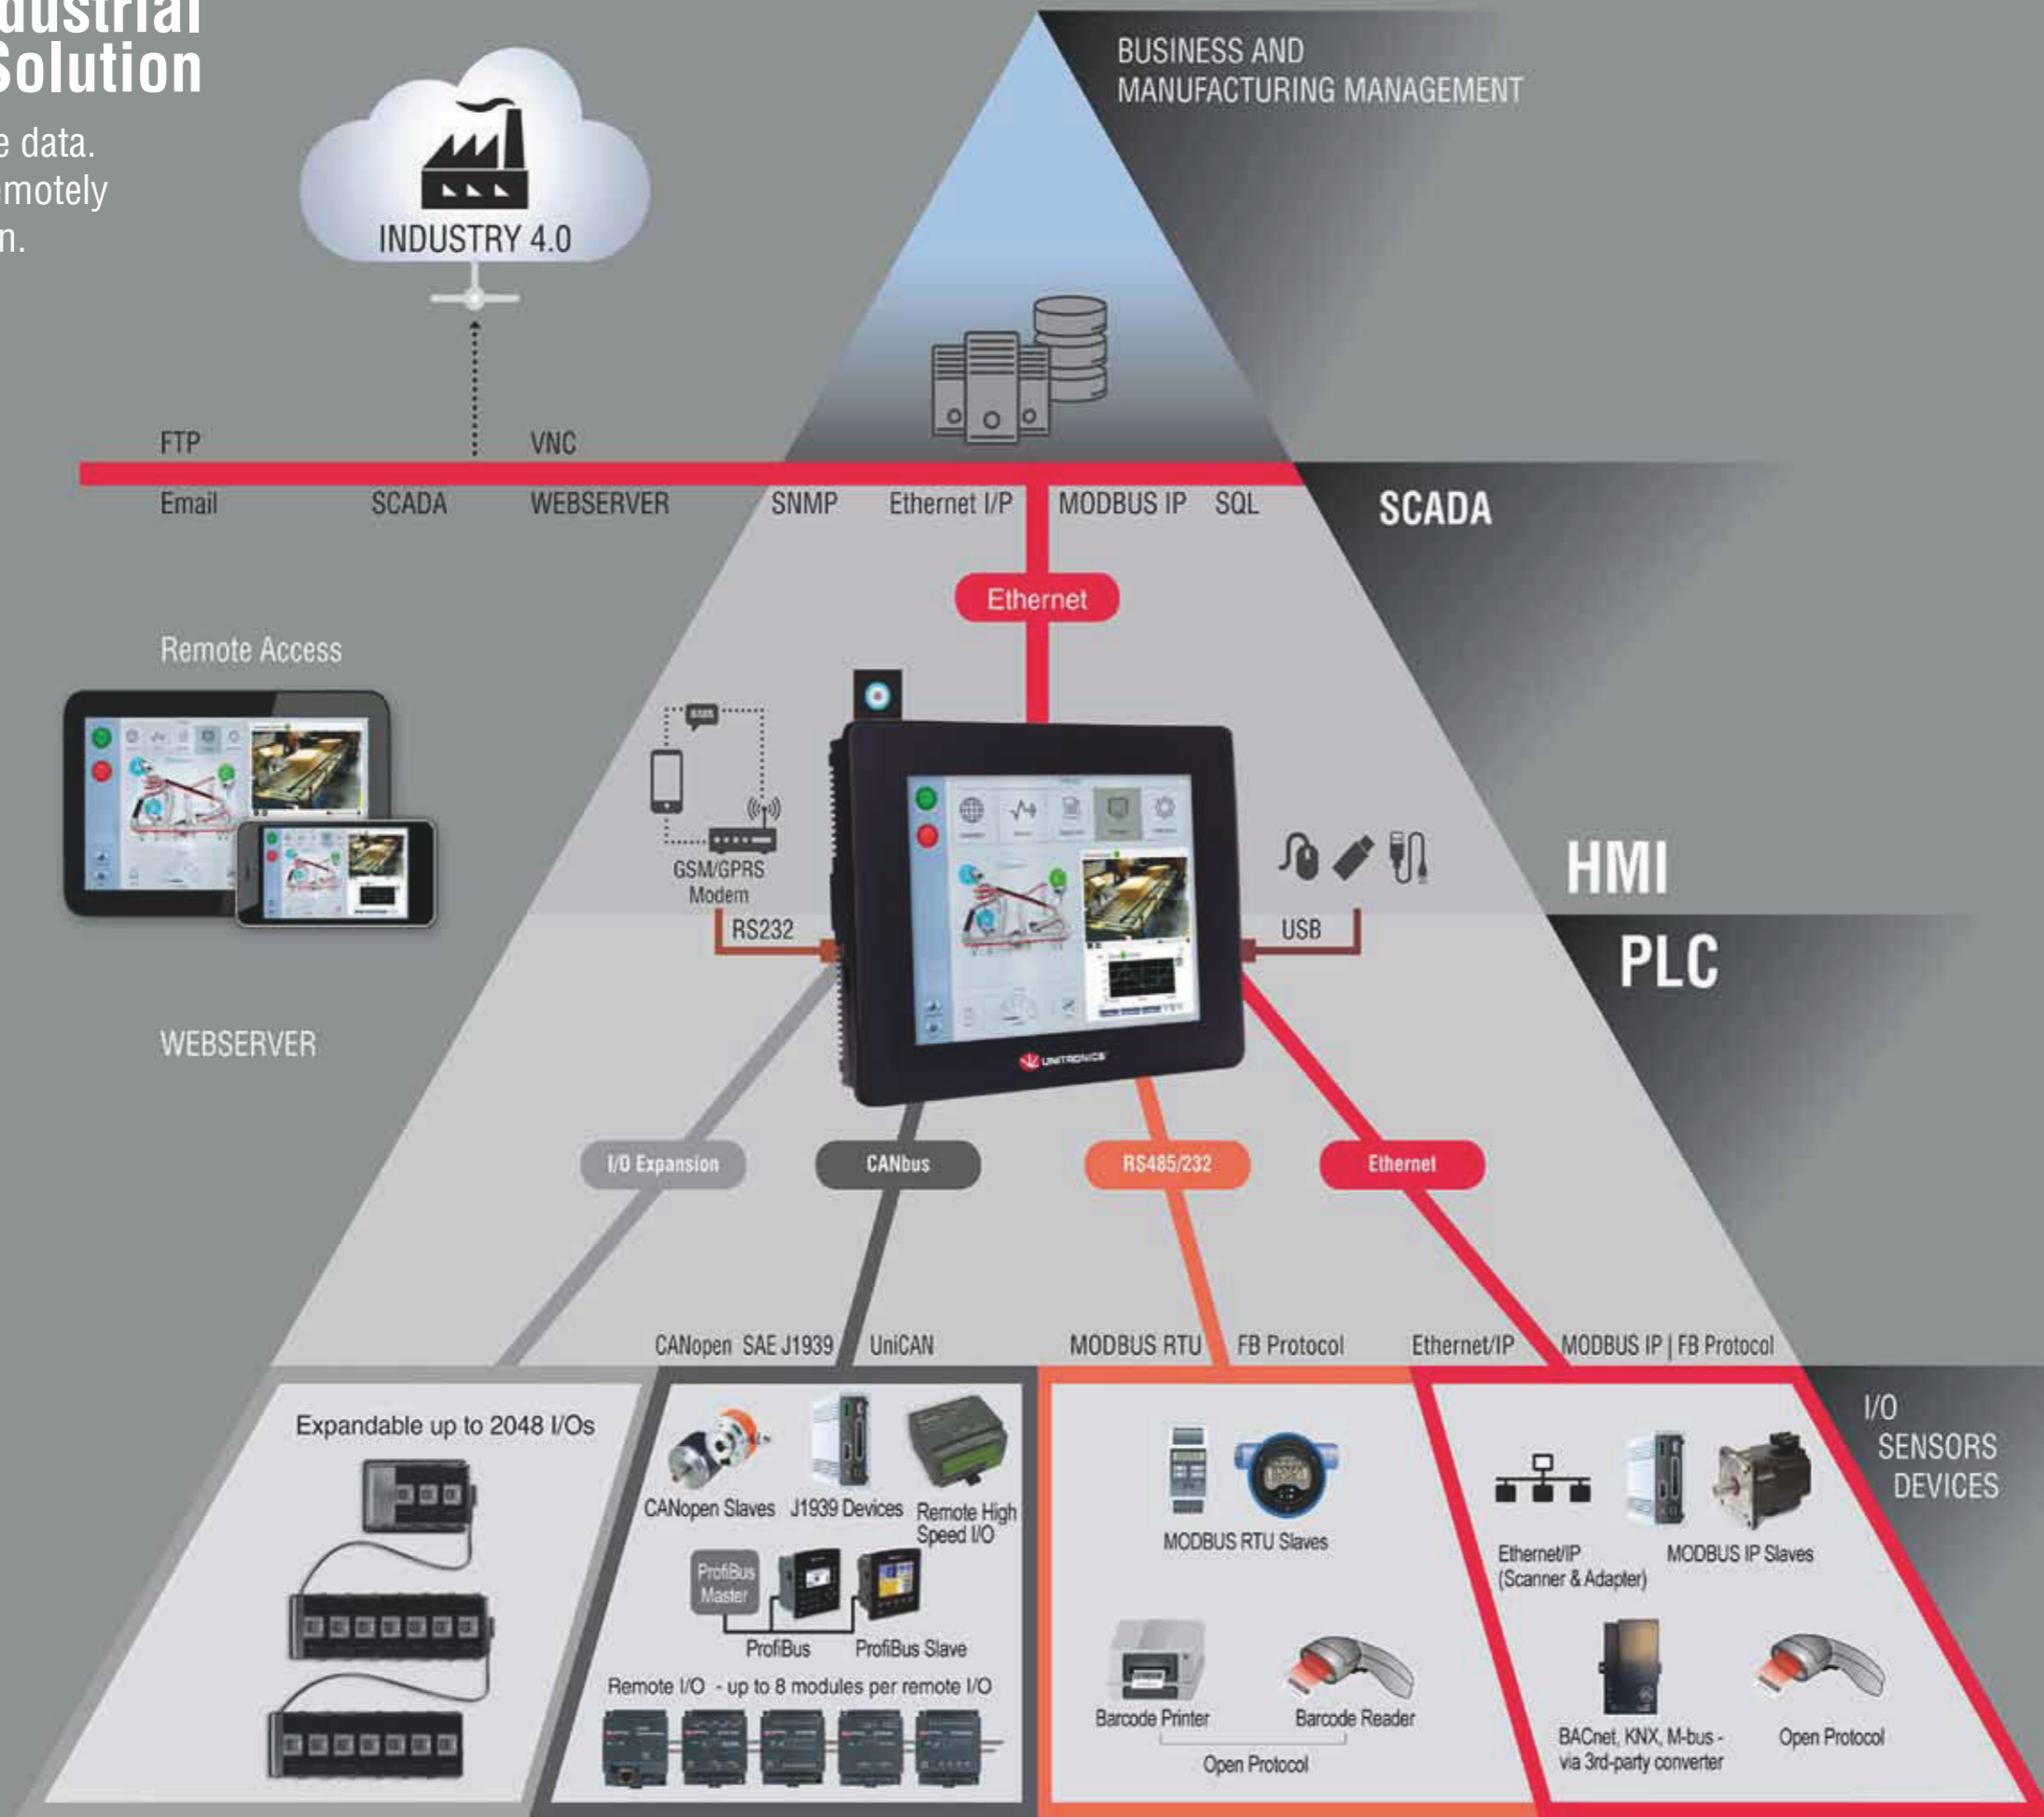

The information in this document reflects products at the date of printing. Unitronics reserves the right, subject to all applicable laws, at any time, at its sole discretion, and without notice, to discontinue or change the features, designs, materials and other specifications of its products, and to either permanently or temporarily withdraw any of the foregoing from the market. All information in this document is provided „as is“ without warranty of any kind, either expressed or implied, including but not limited to any implied warranties of merchantability, fitness for a particular purpose, or non-infringement.

Unitronics assumes no responsibility for errors or omissions in the information presented in this document. In no event shall Unitronics be liable for any special, incidental, indirect or consequential damages of any kind, or any damages whatsoever arising out of or in connection with the use or performance of this information. The trade names, trademarks, logos and service marks presented in this document, including their design, are the property of Unitronics (1989) (R’G) Ltd. or other third parties and you are not permitted to use them without the prior written consent of Unitronics or such third party as may own them.



	<b>Argentina:</b> AEA SACIF Tel: 11 457 41 555, Fax: 11 457 42 400 servicioalcliente@aea.com.ar, www.aea.com.ar		<b>Honduras:</b> Electrical Dealer Tel: 558 1400, Fax: 557 9709 info@electrical-dealer.com, www.electrical-dealer.com		<b>Romania:</b> Local Romanian distributors: contact Unitronics Ltd. Tel (Israel): +972 3 9778893 / 5, Fax: +972 3 9778877 Global.sales@unitronics.com, www.unitronics.com
	<b>Australia:</b> Local Australian distributors: contact Unitronics Ltd. Tel (Israel): +972 3 977 88 94, Fax: +972 3 977 88 77 Global.sales@unitronics.com, www.unitronics.com		<b>Hungary:</b> Kvalix Automatika Kft. Tel: 1 272 2242, Fax: 1 272 2244 info@kvalix.hu, www.kvalix.hu		<b>Russia:</b> ZAO Klinkmann Spb St.Petersburg Tel: 812 327 37 52/26, Fax: 812 327 37 53 klinkmann@Klinkmann.spb.ru, www.klinkmann.com Moscow branch Tel: 495 641 1616, Fax: 495 641 3434 moscow@klinkmann.spb.ru, www.klinkman.com Yekaterinburg branch Tel: 343 287 19 19, Fax: 343 287 19 19 yekaterinburg@klinkmann.spb.ru, www.klinkman.com Samara branch Tel: 846 273 95 85, Fax: 846 273 95 85 samara@klinkmann.spb.ru, www.klinkman.com
	<b>Austria:</b> Schmachtl GmbH Tel: 0732/7646-0, Fax: 0732/7-646-704 office@schmachtl.at, www.schmachtl.at		<b>Iceland:</b> Samey ehf Tel: 510 5200, Fax: 510 5200 Sala@samey.is, www.samey.is		<b>Serbia:</b> Tipteh d.o.o. Beograd Tel: 381 11 30 18 326, Fax: 381 11 31 01 057 damir.vecerka@tipteh.rs, www.tipteh.rs
	<b>Belarus:</b> Klinkmann Belarus Tel: 17 2000876, Fax: 17 2272082 minsk@klinkmann.com, www.klinkmann.com		<b>India:</b> Rajdeep Automation Pvt Ltd. Tel: 020-243 937 55, Fax: 020 243 937 56 sales@rajdeep.in / info@rajdeep.in, www.rajdeep.in		<b>Singapore:</b> YT AUTOMATION SINGAPORE PTE LTD Tel: 66840702, Fax: 66840703 ytautomation@singnet.com.sg, www.ytautomation.com
	<b>Belgium:</b> Isotron Systems BVBA Tel: 034 507 045, Fax: 034 507 046 info@isotron.eu, www.isotron.eu		<b>Ireland:</b> UMAC Systems Ltd. Tel (Israel): +353 1 9055835 sales@umacsystems.com, www.umacsystems.com		<b>Slovakia:</b> S.D.A. s.r.o Tel: 48 472 34 11, Fax: 48 472 34 69 sekretariat@s-d-a.sk, www.s-d-a.sk
	<b>Bosnia and Herzegovina:</b> Tipteh d.o.o. Beograd Tel: 381 11 30 18 326, Fax: 381 11 31 01 057 damir.vecerka@tipteh.rs, www.tipteh.rs		<b>Israel:</b> Zivan - RDT System & Controls Tel: 04 872 98 22, Fax: 04 872 66 27 info@zivan.co.il, www.zivan.co.il		<b>Slovenia:</b> Tipteh d.o.o. Tel: 012 005 150, Fax: 012 005 151 info@tipteh.si, www.tipteh.si
	<b>Brazil:</b> DAKOL Instrumentos e Sistemas Ltda. Tel: (11) 3231 4544, Fax: (11) 3231 4544 vendas@dakol.com.br, www.dakol.com.br		<b>Italy:</b> TELESTAR s.r.l. Tel: +39 0321 966 768, Fax: +39 0321 996 281 telestar@telear-automation.it, www.telear-automation.it		<b>South Africa:</b> Vision Automation Tel: 011 826 7365, Fax: 011 826 7361 info@visionautomation.co.za, www.unitronics.co.za
	<b>Bulgaria:</b> Semo Ltd. Tel: 2 942 4754, Fax: 2 942 4762 engineering@semo.bg, www.semo.bg		<b>Kazakhstan:</b> LLP Klinkmann Kazakhstan Tel: +7 (777) 999 48 25, Fax: +7 (777) 152 51 54 sales@klinkmann.kz		<b>Spain:</b> SIDE, SA Tel: 93 846 4801, Fax: 93 849 1394 info@side.es, www.side-automatizacion.com
	<b>Canada:</b> Unitronics, Inc. Toll free: 866 666 6033 Tel: 617 657 6596, Fax: 617 657 6598 usa.sales@unitronics.com, www.unitronics.com		<b>Latvia:</b> Klinkmann Lat Ltd. Tel: 6738 16 17, Fax: 6738 24 51 klinkmann@klinkmann.lv, www.klinkman.com		<b>Sweden:</b> SensorGruppen AB Tel: 040 933030 and Fax: 040 933010 info@sensorgruppen.se, www.sensorgruppen.se
	<b>Chile:</b> Schädler Sick SpA Tel: (2) 274 7430, Fax: (2) 204 9338 info@schadler.com, www.schadler.com		<b>Lithuania:</b> UAB Klinkmann Lit Tel: 5 216 1646, Fax: 5 216 2641 post@klinkmann.lt, www.klinkmann.com		<b>Switzerland:</b> COMAT AG Industrielle Elektronik Tel: (0) 31 838 55 77, Fax: (0) 31 838 55 99 info@comat.ch, www.comat.ch
	<b>China:</b> Beijing Ample Thrive CO, Ltd. Tel: 010-88177186, 010-88177187 wangtianyu@atisafe.com, www.a082.com		<b>Macedonia:</b> Tipteh d.o.o. Skopje Tel: 070 399 474, Fax: 023 174 197 tipteh@on.net.mk, www.tipteh.si		<b>Taiwan:</b> MARK Automation Tek. Inc. Tel: 02-25117669, Fax: 02-29568289 marktech@ms31.hinet.net, www.marktech.com.tw
	<b>Colombia:</b> COLSEIN Ltda. Tel: 1-519 0967, Fax: 1-519 0967 Ext. 101 info@colsein.com.co, www.colsein.com.co		<b>Malaysia:</b> Yewtech SDN BHD Tel: (60) 16 876 1575, Fax: (60) 7 862 8457 sales@yewtech.com, www.yewtech.com		<b>Thailand:</b> Themtech Company Ltd. Tel: (2) 693 66 29, Fax: (2) 693-66 30 sales@themtech.co.th, www.themtech.co.th
	<b>Croatia:</b> Tipteh d.o.o. (Slovenia) Tel: 013 816 574, Fax: 013 816 577 tipteh@tipteh.hr, www.tipteh.si		<b>Malta:</b> RAYAIR Automation Limited Tel: 2 16 724 97, Fax: 21 8 051 81 Info@rayair-automation.com sales@rayair-automation.com, www.rayair-automation.com		<b>Turkey:</b> YORUM OTOMASYON MALZEMELERI SAN. VE TIC. A.S. Tel: 216 364 69 69, Fax: 216 364 69 75 yorum@yorum-automation.com, www.yorum-automation.com
	<b>Cyprus:</b> Anaxagoras Pneumatics Ltd. Tel: 022 442 200, Fax: 022 495 953 sales@anaxagoras.eu, www.anaxagoras.eu		<b>Mexico:</b> Sistemas de Control Autec, S.A. de C.V. Tel: 55 527 885 19, Fax: 55 527 885 32 soporte@scautec.com, www.scautec.com		<b>Ukraine:</b> Klinkmann Ukraine LLC Tel: 44 495 33 40, Fax: 44 495 33 41 klinkmann.kiev@klinkmann.kiev.ua, www.klinkmann.com
	<b>Czech Republic:</b> Schmachtl CZ, spol. s r.o. Tel: 244 001 559, Fax: 244 910 700 unitronics@schmachtl.cz, www.schmachtl.cz		<b>The Netherlands:</b> Isotron Systems BV Tel: 073 639 1639, Fax: 073 639 1699 info@isotron.nl, www.isotron.nl		<b>United Kingdom:</b> Local UK distributors: contact Unitronics Ltd. Tel: +44 800 2061017 (toll free number) Global.sales@unitronics.com, www.unitronics.com
	<b>Denmark:</b> Desim Elektronik ApS Tel: 70 22 00 66, Fax: 70 22 22 20 desim@desim.dk, www.desim.dk		<b>New Zealand:</b> EMC Industrial Group Ltd. Tel: 9 415 5110, Fax: 9 415 51 15 sales@emc.co.nz, www.emc.co.nz		<b>USA:</b> Unitronics Inc. Toll free: 866 666 6033 Tel: 617 657 6596, Fax: 617 657 6598 usa.sales@unitronics.com, www.unitronics.com
	<b>Ecuador:</b> Local Ecuadorian distributors: contact Unitronics Ltd. Tel (Israel): +972 3 9778893 / 5, Fax: +972 3 9778877 Global.sales@unitronics.com, www.unitronics.com		<b>Nigeria:</b> Technosuite Limited Tel: 1 804 0237, Fax: 1 271 6985 enquiries@technosuiteltd.com, www.technosuiteltd.com		<b>Venezuela and Panama:</b> Intrave, S.A Tel: +507 6275 0055, Fax: 0212 951 2521 Venezuela: +58-212-720 7805, Panamá: +507-838 5558 ventas@intrave.com, www.intrave.com, panama@intrave.com
	<b>Estonia:</b> Klinkmann Eesti AS Tel: 6 684 500, Fax: 6 684 501 info@klinkmann.ee, www.klinkmann.com		<b>Norway:</b> Tormatic as Tel: 33 16 50 20, Fax: 33 16 50 45 info@tormatic.no, www.tormatic.no		<b>Vietnam:</b> ANS Tel: 8 3517 0401 Ext:17, Fax: 8 3517 0403 sales.ans@ansvietnam.com, www.ansvietnam.com
	<b>Finland:</b> Klinkmann Automation Oy Tel: 9 540 49 40, Fax: 9 541 35 41 automation@klinkmann.fi, www.klinkmann.com		<b>Peru:</b> EPLI SAC Tel: 330 1595, Fax: 431 1492 info@eppli.com.pe, www.eppli.com.pe		<b>Philippines:</b> Cosine Industries INC Tel: 632-367-0025 to 28, Fax: 2 412 73 21 jbco@cosine.com.ph, sales@cosine.com.ph www.cosine.net.ph
	<b>France:</b> PL Systems Tel: 016 092 4171, Fax: 016 928 4193 info@pl-systems.fr, www.pl-systems.fr		<b>Poland:</b> Elmark Automatyka Sp. zo.o. Tel: 22 541 84 60, Fax: 22 541 84 61 elmark@elmark.com.pl, www.elmark.com.pl		<b>Portugal:</b> Tecnilab Portugal, SA Tel: 21 722 08 70, Fax: 21 726 45 50 geral@tecnilab.pt, www.tecnilab.pt
	<b>Germany:</b> Spectra GmbH & Co. KG. Tel: 0 71 21/ 143 21-0, Fax: 0 71 21/ 143 21-90 spectra@spectra.de, www.spectra.de		<b>Romania:</b> Local Romanian distributors: contact Unitronics Ltd. Tel (Israel): +972 3 9778893 / 5, Fax: +972 3 9778877 Global.sales@unitronics.com, www.unitronics.com		<b>Russia:</b> ZAO Klinkmann Spb St.Petersburg Tel: 812 327 37 52/26, Fax: 812 327 37 53 klinkmann@Klinkmann.spb.ru, www.klinkmann.com Moscow branch Tel: 495 641 1616, Fax: 495 641 3434 moscow@klinkmann.spb.ru, www.klinkman.com Yekaterinburg branch Tel: 343 287 19 19, Fax: 343 287 19 19 yekaterinburg@klinkmann.spb.ru, www.klinkman.com Samara branch Tel: 846 273 95 85, Fax: 846 273 95 85 samara@klinkmann.spb.ru, www.klinkman.com
	<b>Greece:</b> MAS S.A Tel: 210-4014000, Fax: 210-4001652 info@mas.gr, www.mas.gr		<b>Slovakia:</b> S.D.A. s.r.o Tel: 48 472 34 11, Fax: 48 472 34 69 sekretariat@s-d-a.sk, www.s-d-a.sk		<b>Slovenia:</b> Tipteh d.o.o. Tel: 012 005 150, Fax: 012 005 151 info@tipteh.si, www.tipteh.si
	<b>Hong Kong:</b> Automate Control Engineering Ltd. Tel: 02 342 72 76, Fax: 02 342 72 29 ace@automate.corp.com.hk, www.automate-ace.com		<b>Spain:</b> SIDE, SA Tel: 93 846 4801, Fax: 93 849 1394 info@side.es, www.side-automatizacion.com		<b>Sweden:</b> SensorGruppen AB Tel: 040 933030 and Fax: 040 933010 info@sensorgruppen.se, www.sensorgruppen.se